

NATIONAL EXAMINATIONS MAY 2019
17-Phys-B6, Applied Thermodynamics and Heat Transfer

3 Hours Duration

Notes :

1. If doubt exists concerning the interpretation of any question, the candidate is urged to make assumptions and clearly explain what has been assumed along with the answer to the question.
2. The examination is open book. As a consequence, candidates are permitted to make use of any textbooks, references or notes.
3. Any non-communicating calculator is permitted. However, candidates must indicate the type of calculator(s) that they have used by writing the name and model designation of the calculator(s) on the inside of the cover of the first examination book.
4. It is expected that each candidate will have copies of both a thermodynamics text and a heat transfer text in order to make use of the information presented in the tables and graphs contained.
5. The answers to five questions, either three questions from Part A and two questions from Part B or two questions from Part A and three questions from Part B, comprise a complete examination.
6. Candidates must indicate the answers that they wish to have graded on the cover of the first examination book. Otherwise the answers will be graded in the order in which they appear in the examination book(s) up to a maximum of three answers per section.
7. The answer to any question carries the same value in the grading.


Continued on Page 2

PART A - THERMODYNAMICS

1(a) The equation of state and the internal energy relationship of a certain gas are $pv = 0.317(T+273)$ and $u = u_0 + 0.846T$ respectively where p is the pressure of the gas in kN/m^2 , v is the specific volume of the gas in m^3/kg , T is the temperature of the gas in $^\circ\text{C}$ and u is the internal energy of the gas in kJ/kg . A cylinder fitted with a piston contains 0.025 m^3 of the gas at a pressure of 350 kN/m^2 and a temperature of 80°C . The gas is allowed to expand to a lower pressure during which the work done by the gas is 2.85 J and the heat transferred by the gas is 1.90 J . Determine the temperature of the gas after the expansion. If the gas undergoes a different process between the same end states in which no heat is transferred, how much work will be done during the process?

(b) Saturated liquid ammonia at 50°C expands through a partially open valve to a pressure of 0.45 MPa . Determine the temperature and quality of the fluid after the expansion process. Identify the state points and sketch the process on a temperature-entropy diagram.

2. High pressure steam is expanded to an intermediate pressure in the high pressure stage of the two stage turbine depicted below after which a portion of the discharge returns to the boiler to be reheated before being passed to the low pressure stage of the turbine. The remainder of the steam discharged by the high pressure stage is passed directly to the low pressure stage of the turbine.

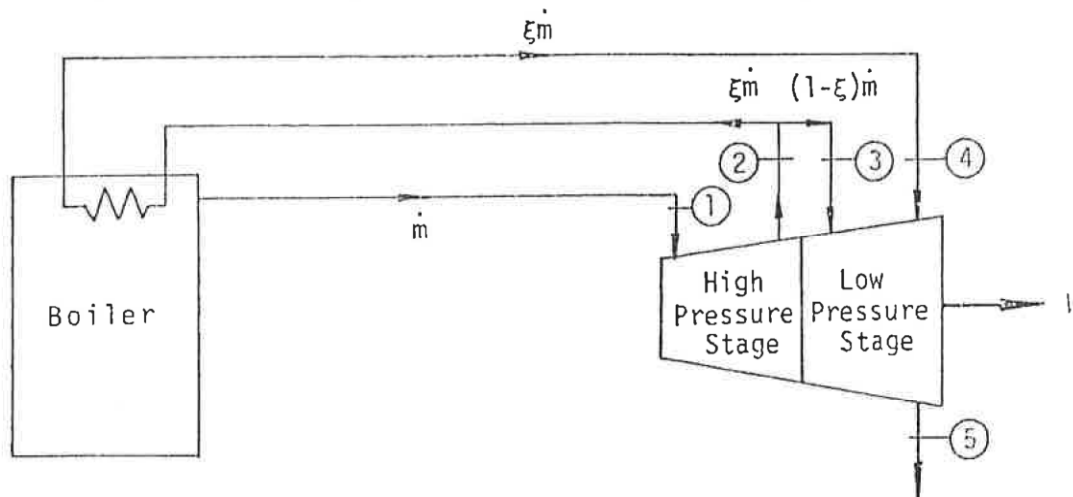

The operating conditions associated with the turbine are listed below.

$$P_1 = 4.0 \text{ MPa}$$

$$W = 7500 \text{ kW}$$

$$P_2 = 0.4 \text{ MPa}$$

$$T_1 = 650^\circ\text{C}$$

$$P_3 = 0.4 \text{ MPa}$$

$$T_2 = 300^\circ\text{C}$$

Continued on Page 3

$$P_1 = 0.4 \text{ MPa}$$

$$T_3 = 300^\circ\text{C}$$

$$P_5 = 7.5 \text{ kPa}$$

$$T_4 = 550^\circ\text{C}$$

$$\dot{m} = 5.0 \text{ kg/s}$$


$$x_s = 96\%$$

Assuming that the two stage turbine operates adiabatically, determine

- The fraction of the steam ξ leaving the high pressure stage of the turbine which is returned to the boiler for reheating.
- The net change in entropy of the two stage turbine per unit mass of steam entering the high pressure stage of the turbine.
- The isentropic efficiency of the two stage steam turbine.

Identify the various state points on a temperature-entropy diagram.

3.

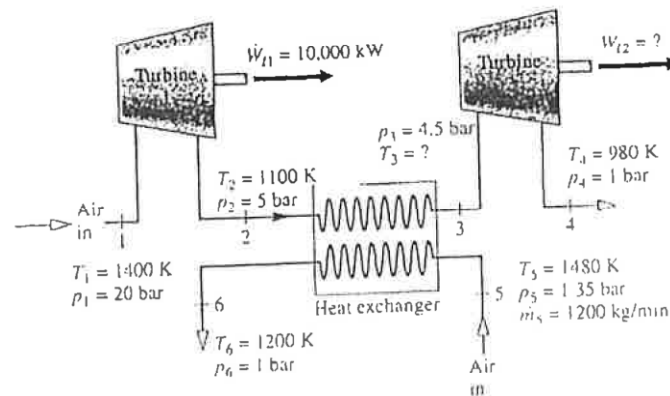

The illustration above depicts the arrangement of the components of a power system which is comprised of two turbines and a heat exchanger. Air enters turbine 1 at temperature T_1 and pressure p_1 , producing power W_{t1} , after which it exits at temperature T_2 and pressure p_2 . Subsequently, the air passes through the heat exchanger where it is heated to temperature T_3 and pressure p_3 , after which it enters turbine 2 producing power W_{t2} and exits at temperature T_4 and pressure p_4 . Considering the air to behave as an ideal gas, determine the temperature of the air exiting the heat exchanger T_3 , and the power produced by the second turbine W_{t2} , as well as the thermal efficiency of the turbines and the heat exchanger effectiveness. Depict the various processes on a Ts diagram.

Continued on Page 4

4. Refrigerant 134a enters the compressor of a refrigerator as superheated vapour at 0.14 MPa and -10°C at a rate of 0.05 kg/s and leaves at 0.8 MPa and 50°C . The refrigerant is cooled in the condenser to 26°C and 0.72 MPa and is throttled to 0.15 MPa. Show the refrigeration cycle on a temperature / entropy diagram. Disregarding any heat transfer and pressure drops in the lines connecting the components, determine

(a) The rate of heat removal from the refrigerated space, the power input required by the compressor, the isentropic efficiency of the compressor and the coefficient of performance of the actual refrigeration cycle.

(b) Compare the performance of the actual cycle with that of the ideal cycle operating at the same condenser and evaporator pressures. How much greater is the rate of heat removal from the refrigerated space of the actual refrigeration cycle than that of the ideal refrigeration cycle? How much greater is the compressor power input required to achieve it?

PART B - HEAT TRANSFER

5. A self cleaning oven with a composite window separating the oven from the room air comprised of two pieces of high temperature resisting plastic A and B bonded together is being designed by a leading manufacturer of household appliances. The thicknesses of the plastic are such that $L_A = 3 L_B$ and the thermal conductivities are $k_A = 0.18 \text{ W/m}^{\circ}\text{C}$ and $k_B = 0.10 \text{ W/m}^{\circ}\text{C}$ respectively. During the self cleaning process, the temperatures of the walls of the oven T_w and the air in the oven T_o may be considered to be 500°C and the temperature of the air in the room T_r may be considered to be 25°C . The coefficients of convection h_{ci} and radiation h_r inside of the oven as well as the coefficient of convection outside of the oven h_{co} may all be taken as $25 \text{ W/m}^2\text{C}$. What is the minimum thickness of the composite window $L_A + L_B$ needed to ensure that the temperature of the outside surface T_o is 50°C or less for safety reasons?

6. The evaporator section of a heat pump is installed in a large tank of water which is used as an energy source during the winter. As energy is extracted from the water it freezes, creating an ice/water mixture at $T_m = 0^{\circ}\text{C}$ which is used for air conditioning during the summer. Consider summer conditions during which air is passed through an array of 10 copper tubes $D = 50 \text{ mm}$ inside diameter submerged in the ice/water mixture.

(a) If air enters at $T_{a,i} = 24^{\circ}\text{C}$ at a flow rate of $\dot{m} = 0.01 \text{ kg/s}$, what tube length L is required to attain an exit temperature of $T_{a,e} = 14^{\circ}\text{C}$?

(b) If the volume of the tank $V = 10 \text{ m}^3$ and the tank contains 80% ice by volume, how long would it take to melt the ice completely? Consider the density of the ice to be $\rho_i = 920 \text{ kg/m}^3$ and the latent heat of fusion to be $h_{if} = 3.34 \times 10^5 \text{ J/kg}$ respectively.

Continued on Page 5

7. A power amplifier which may be modelled as a thin rectangular plate 40 mm high by 50 mm long for the purposes of analysis is oriented vertically in air at 25 °C. The case of the power amplifier is made of anodized aluminum for which the surface emissivity is 0.82. The heat generated within the power amplifier is 7 W. Determine the temperature of the surface when natural convection and radiation heat transfer both act to remove the heat.

8. Water flowing at 3.8 kg/s is heated from 38°C to 55°C in the tubes of a shell-and-tube heat exchanger. Water flowing at 1.9 kg/s enters the heat exchanger at 94°C and passes once through the shell side. The overall heat transfer coefficient is 1420 W/m²°C. The density of the water flowing in the 1.905 cm diameter tubes is 961 kg/m³ and the average water velocity is 0.386 m/s. Because of space limitations, the heat exchanger cannot be greater than 2.44 m in length. Determine the number of tubes and the number of tube passes required consistent with this limitation.

The End

Thermodynamic Properties of Ammonia

Saturated Ammonia

Temp. °C	Abs. Press. kPa <i>P</i>	Specific Volume m ³ /kg			Enthalpy kJ/kg			Entropy kJ/kg K		
		Sat. Liquid <i>v_f</i>	Evap. <i>v_{fg}</i>	Sat. Vapor <i>v_g</i>	Sat. Liquid <i>h_f</i>	Evap. <i>h_{fg}</i>	Sat. Vapor <i>h_g</i>	Sat. Liquid <i>s_f</i>	Evap. <i>s_{fg}</i>	Sat. Vapor <i>s_g</i>
-50	40.88	0.001 424	2.6239	2.6254	-44.3	1416.7	1372.4	-0.1942	6.3502	6.1561
-48	45.96	0.001 429	2.3518	2.3533	-35.5	1411.3	1375.8	-0.1547	6.2696	6.1149
-46	51.55	0.001 434	2.1126	2.1140	-26.6	1405.8	1379.2	-0.1156	6.1902	6.0746
-44	57.69	0.001 439	1.9018	1.9032	-17.8	1400.3	1382.5	-0.0768	6.1120	6.0352
-42	64.42	0.001 444	1.7155	1.7170	-8.9	1394.7	1385.8	-0.0382	6.0349	5.9967
-40	71.77	0.001 449	1.5506	1.5521	0.0	1389.0	1389.0	0.0000	5.9589	5.9589
-38	79.80	0.001 454	1.4043	1.4058	8.9	1383.3	1392.2	0.0380	5.8840	5.9220
-36	88.54	0.001 460	1.2742	1.2757	17.8	1377.6	1395.4	0.0757	5.8101	5.8858
-34	98.05	0.001 465	1.1582	1.1597	26.8	1371.8	1398.5	0.1132	5.7372	5.8504
-32	108.37	0.001 470	1.0547	1.0562	35.7	1365.9	1401.6	0.1504	5.6652	5.8156
-30	119.55	0.001 476	0.9621	0.9635	44.7	1360.0	1404.6	0.1873	5.5942	5.7815
-28	131.64	0.001 481	0.8790	0.8805	53.6	1354.0	1407.6	0.2240	5.5241	5.7481
-26	144.70	0.001 487	0.8044	0.8059	62.6	1347.9	1410.5	0.2605	5.4548	5.7153
-24	158.78	0.001 492	0.7373	0.7388	71.6	1341.8	1413.4	0.2967	5.3864	5.6831
-22	173.93	0.001 498	0.6768	0.6783	80.7	1335.6	1416.2	0.3327	5.3188	5.6515
-20	190.22	0.001 504	0.6222	0.6237	89.7	1329.3	1419.0	0.3684	5.2520	5.6205
-18	207.71	0.001 510	0.5728	0.5743	98.8	1322.9	1421.7	0.4040	5.1860	5.5900
-16	226.45	0.001 515	0.5280	0.5296	107.8	1316.5	1424.4	0.4393	5.1207	5.5600
-14	246.51	0.001 521	0.4874	0.4889	116.9	1310.0	1427.0	0.4744	5.0561	5.5305
-12	267.95	0.001 528	0.4505	0.4520	126.0	1303.5	1429.5	0.5093	4.9922	5.5015
-10	290.85	0.001 534	0.4169	0.4185	135.2	1296.8	1432.0	0.5440	4.9290	5.4730
-8	315.25	0.001 540	0.3863	0.3878	144.3	1290.1	1434.4	0.5785	4.8664	5.4449
-6	341.25	0.001 546	0.3583	0.3599	153.5	1283.3	1436.8	0.6128	4.8045	5.4173
-4	368.90	0.001 553	0.3328	0.3343	162.7	1276.4	1439.1	0.6469	4.7432	5.3901
-2	398.27	0.001 559	0.3094	0.3109	171.9	1269.4	1441.3	0.6808	4.6825	5.3633
0	429.44	0.001 566	0.2879	0.2895	181.1	1262.4	1443.5	0.7145	4.6223	5.3369
2	462.49	0.001 573	0.2683	0.2698	190.4	1255.2	1445.6	0.7481	4.5627	5.3108
4	497.49	0.001 580	0.2502	0.2517	199.6	1248.0	1447.6	0.7815	4.5037	5.2852
6	534.51	0.001 587	0.2335	0.2351	208.9	1240.6	1449.6	0.8148	4.4451	5.2599
8	573.64	0.001 594	0.2182	0.2198	218.3	1233.2	1451.5	0.8479	4.3871	5.2350
10	614.95	0.001 601	0.2040	0.2056	227.6	1225.7	1453.3	0.8808	4.3295	5.2104
12	658.52	0.001 608	0.1910	0.1926	237.0	1218.1	1455.1	0.9136	4.2725	5.1861
14	704.44	0.001 616	0.1789	0.1805	246.4	1210.4	1456.8	0.9463	4.2159	5.1621
16	752.79	0.001 623	0.1677	0.1693	255.9	1202.6	1458.5	0.9788	4.1597	5.1385
18	803.66	0.001 631	0.1574	0.1590	265.4	1194.7	1460.0	1.0112	4.1039	5.1151
20	857.12	0.001 639	0.1477	0.1494	274.9	1186.7	1461.5	1.0434	4.0486	5.0920
22	913.27	0.001 647	0.1388	0.1405	284.4	1178.5	1462.9	1.0755	3.9937	5.0692
24	972.19	0.001 655	0.1305	0.1322	294.0	1170.3	1464.3	1.1075	3.9392	5.0467
26	1033.97	0.001 663	0.1228	0.1245	303.6	1162.0	1465.6	1.1394	3.8850	5.0244
28	1098.71	0.001 671	0.1156	0.1173	313.2	1153.6	1466.8	1.1711	3.8312	5.0023
30	1166.49	0.001 680	0.1089	0.1106	322.9	1145.0	1467.9	1.2028	3.7777	4.9805
32	1237.41	0.001 689	0.1027	0.1044	332.6	1136.4	1469.0	1.2343	3.7246	4.9589
34	1311.55	0.001 698	0.0969	0.0986	342.3	1127.6	1469.9	1.2656	3.6718	4.9374
36	1389.03	0.001 707	0.0914	0.0931	352.1	1118.7	1470.8	1.2969	3.6192	4.9161
38	1469.92	0.001 716	0.0863	0.0880	361.9	1109.7	1471.5	1.3281	3.5669	4.8950
40	1554.33	0.001 726	0.0815	0.0833	371.7	1100.5	1472.2	1.3591	3.5148	4.8740
42	1642.35	0.001 735	0.0771	0.0788	381.6	1091.2	1472.8	1.3901	3.4630	4.8530
44	1734.09	0.001 745	0.0728	0.0746	391.5	1081.7	1473.2	1.4209	3.4112	4.8322
46	1829.65	0.001 756	0.0689	0.0707	401.5	1072.0	1473.5	1.4518	3.3595	4.8113
48	1929.13	0.001 766	0.0652	0.0669	411.5	1062.2	1473.7	1.4826	3.3079	4.7905
50	2032.62	0.001 777	0.0617	0.0635	421.7	1052.0	1473.7	1.5135	3.2561	4.7696

Thermodynamic Properties of R134A

Saturated R134A

Temp. °C	Press. bars	Specific Volume m ³ /kg		Internal Energy kJ/kg		Enthalpy kJ/kg			Entropy kJ/kg · K		Temp. °C
		Sat. Liquid $v_f \times 10^3$	Sat. Vapor v_g	Sat. Liquid u_f	Sat. Vapor u_g	Sat. Liquid h_f	Evap. h_{fg}	Sat. Vapor h_g	Sat. Liquid s_f	Sat. Vapor s_g	
-40	0.5164	0.7055	0.3569	-0.04	204.45	0.00	222.88	222.88	0.0000	0.9560	-40
-36	0.6332	0.7113	0.2947	4.68	206.73	4.73	220.67	225.40	0.0201	0.9506	-36
-32	0.7704	0.7172	0.2451	9.47	209.01	9.52	218.37	227.90	0.0401	0.9456	-32
-28	0.9305	0.7233	0.2052	14.31	211.29	14.37	216.01	230.38	0.0600	0.9411	-28
-26	1.0199	0.7265	0.1882	16.75	212.43	16.82	214.80	231.62	0.0699	0.9390	-26
-24	1.1160	0.7296	0.1728	19.21	213.57	19.29	213.57	232.85	0.0798	0.9370	-24
-22	1.2192	0.7328	0.1590	21.68	214.70	21.77	212.32	234.08	0.0897	0.9351	-22
-20	1.3299	0.7361	0.1464	24.17	215.84	24.26	211.05	235.31	0.0996	0.9332	-20
-18	1.4483	0.7395	0.1350	26.67	216.97	26.77	209.76	236.53	0.1094	0.9315	-18
-16	1.5748	0.7428	0.1247	29.18	218.10	29.30	208.45	237.74	0.1192	0.9298	-16
-12	1.8540	0.7498	0.1068	34.25	220.36	34.39	205.77	240.15	0.1388	0.9267	-12
-8	2.1704	0.7569	0.0919	39.38	222.60	39.54	203.00	242.54	0.1583	0.9239	-8
-4	2.5274	0.7644	0.0794	44.56	224.84	44.75	200.15	244.90	0.1777	0.9213	-4
0	2.9282	0.7721	0.0689	49.79	227.06	50.02	197.21	247.23	0.1970	0.9190	0
4	3.3765	0.7801	0.0600	55.08	229.27	55.35	194.19	249.53	0.2162	0.9169	4
8	3.8756	0.7884	0.0525	60.43	231.46	60.73	191.07	251.80	0.2354	0.9150	8
12	4.4294	0.7971	0.0460	65.83	233.63	66.18	187.85	254.03	0.2545	0.9132	12
16	5.0416	0.8062	0.0405	71.29	235.78	71.69	184.52	256.22	0.2735	0.9116	16
20	5.7160	0.8157	0.0358	76.80	237.91	77.26	181.09	258.36	0.2924	0.9102	20
24	6.4566	0.8257	0.0317	82.37	240.01	82.90	177.55	260.45	0.3113	0.9089	24
26	6.8530	0.8309	0.0298	85.18	241.05	85.75	175.73	261.48	0.3208	0.9082	26
28	7.2675	0.8362	0.0281	88.00	242.08	88.61	173.89	262.50	0.3302	0.9076	28
30	7.7006	0.8417	0.0265	90.84	243.10	91.49	172.00	263.50	0.3396	0.9070	30
32	8.1528	0.8473	0.0250	93.70	244.12	94.39	170.09	264.48	0.3490	0.9064	32
34	8.6247	0.8530	0.0236	96.58	245.12	97.31	168.14	265.45	0.3584	0.9058	34
36	9.1168	0.8590	0.0223	99.47	246.11	100.25	166.15	266.40	0.3678	0.9053	36
38	9.6298	0.8651	0.0210	102.38	247.09	103.21	164.12	267.33	0.3772	0.9047	38
40	10.164	0.8714	0.0199	105.30	248.06	106.19	162.05	268.24	0.3866	0.9041	40
42	10.720	0.8780	0.0188	108.25	249.02	109.19	159.94	269.14	0.3960	0.9035	42
44	11.299	0.8847	0.0177	111.22	249.96	112.22	157.79	270.01	0.4054	0.9030	44
48	12.526	0.8989	0.0159	117.22	251.79	118.35	153.33	271.68	0.4243	0.9017	48
52	13.851	0.9142	0.0142	123.31	253.55	124.58	148.66	273.24	0.4432	0.9004	52
56	15.278	0.9308	0.0127	129.51	255.23	130.93	143.75	274.68	0.4622	0.8990	56
60	16.813	0.9488	0.0114	135.82	256.81	137.42	138.57	275.99	0.4814	0.8973	60
70	21.162	1.0027	0.0086	152.22	260.15	154.34	124.08	278.43	0.5302	0.8918	70
80	26.324	1.0766	0.0064	169.88	262.14	172.71	106.41	279.12	0.5814	0.8827	80
90	32.435	1.1949	0.0046	189.82	261.34	193.69	82.63	276.32	0.6380	0.8655	90
100	39.742	1.5443	0.0027	218.60	248.49	224.74	34.40	259.13	0.7196	0.8117	100

Thermodynamic Properties of R131A

Superheated R134A

T °C	v m ³ /kg	u kJ/kg	h kJ/kg	s kJ/kg · K	v m ³ /kg	u kJ/kg	h kJ/kg	s kJ/kg · K
$p = 0.6 \text{ bars} = 0.06 \text{ MPa}$ $(T_{\text{sat}} = -37.07^\circ\text{C})$					$p = 1.0 \text{ bars} = 0.10 \text{ MPa}$ $(T_{\text{sat}} = -26.43^\circ\text{C})$			
Sat.	0.31003	206.12	224.72	0.9520	0.19170	212.18	231.35	0.9395
-20	0.33536	217.86	237.98	1.0062	0.19770	216.77	236.54	0.9602
-10	0.34992	224.97	245.96	1.0371	0.20686	224.01	244.70	0.9918
0	0.36433	232.24	254.10	1.0675	0.21587	231.41	252.99	1.0227
10	0.37861	239.69	262.41	1.0973	0.22473	238.96	261.43	1.0531
20	0.39279	247.32	270.89	1.1267	0.23349	246.67	270.02	1.0829
30	0.40688	255.12	279.53	1.1557	0.24216	254.54	278.76	1.1122
40	0.42091	263.10	288.35	1.1844	0.25076	262.58	287.66	1.1411
50	0.43487	271.25	297.34	1.2126	0.25930	270.79	296.72	1.1696
60	0.44879	279.58	306.51	1.2405	0.26779	279.16	305.94	1.1977
70	0.46266	288.08	315.84	1.2681	0.27623	287.70	315.32	1.2254
80	0.47650	296.75	325.34	1.2954	0.28464	296.40	324.87	1.2528
90	0.49031	305.58	335.00	1.3224	0.29302	305.27	334.57	1.2799
$p = 1.4 \text{ bars} = 0.14 \text{ MPa}$ $(T_{\text{sat}} = -18.80^\circ\text{C})$					$p = 1.8 \text{ bars} = 0.18 \text{ MPa}$ $(T_{\text{sat}} = -12.73^\circ\text{C})$			
Sat.	0.13945	216.52	236.04	0.9322	0.10983	219.94	239.71	0.9273
-10	0.14549	223.03	243.40	0.9606	0.11135	222.02	242.06	0.9362
0	0.15219	230.55	251.86	0.9922	0.11678	229.67	250.69	0.9684
10	0.15875	238.21	260.43	1.0230	0.12207	237.44	259.41	0.9998
20	0.16520	246.01	269.13	1.0532	0.12723	245.33	268.23	1.0304
30	0.17155	253.96	277.97	1.0828	0.13230	253.36	277.17	1.0604
40	0.17783	262.06	286.96	1.1120	0.13730	261.53	286.24	1.0898
50	0.18404	270.32	296.09	1.1407	0.14222	269.85	295.45	1.1187
60	0.19020	278.74	305.37	1.1690	0.14710	278.31	304.79	1.1472
70	0.19633	287.32	314.80	1.1969	0.15193	286.93	314.28	1.1753
80	0.20241	296.06	324.39	1.2244	0.15672	295.71	323.92	1.2030
90	0.20846	304.95	334.14	1.2516	0.16148	304.63	333.70	1.2303
100	0.21449	314.01	344.04	1.2785	0.16622	313.72	343.63	1.2573
$p = 2.0 \text{ bars} = 0.20 \text{ MPa}$ $(T_{\text{sat}} = -10.09^\circ\text{C})$					$p = 2.4 \text{ bars} = 0.24 \text{ MPa}$ $(T_{\text{sat}} = -5.37^\circ\text{C})$			
Sat.	0.09933	221.43	241.30	0.9253	0.08343	224.07	244.09	0.9222
-10	0.09938	221.50	241.38	0.9256	0.08574	228.31	248.89	0.9399
0	0.10438	229.23	250.10	0.9582	0.08993	236.26	257.84	0.9721
10	0.10922	237.05	258.89	0.9898	0.09399	244.30	266.85	1.0034
20	0.11394	244.99	267.78	1.0206	0.09794	252.45	275.95	1.0339
30	0.11856	253.06	276.77	1.0508	0.10181	260.72	285.16	1.0637
40	0.12311	261.26	285.88	1.0804	0.10562	269.12	294.47	1.0930
50	0.12758	269.61	295.12	1.1094	0.10937	277.67	303.91	1.1218
60	0.13201	278.10	304.50	1.1380	0.11307	286.35	313.49	1.1501
70	0.13639	286.74	314.02	1.1661	0.11674	295.18	323.19	1.1780
80	0.14073	295.53	323.68	1.1939	0.12037	304.15	333.04	1.2055
90	0.14504	304.47	333.48	1.2212	0.12398	313.27	343.03	1.2326
100	0.14932	313.57	343.43	1.2483				

Thermodynamic Properties of R134A

Superheated R134A

T °C	v m ³ /kg	u kJ/kg	h kJ/kg	s kJ/kg · K	v m ³ /kg	u kJ/kg	h kJ/kg	s kJ/kg · K
$p = 6.0 \text{ bars} = 0.60 \text{ MPa}$ ($T_{\text{sat}} = 21.58^\circ\text{C}$)				$p = 7.0 \text{ bars} = 0.70 \text{ MPa}$ ($T_{\text{sat}} = 26.72^\circ\text{C}$)				
Sat.	0.03408	238.74	259.19	0.9097	0.02918	241.42	261.85	0.9080
30	0.03581	246.41	267.89	0.9388	0.02979	244.51	265.37	0.9197
40	0.03774	255.45	278.09	0.9719	0.03157	253.83	275.93	0.9539
50	0.03958	264.48	288.23	1.0037	0.03324	263.08	286.35	0.9867
60	0.04134	273.54	298.35	1.0346	0.03482	272.31	296.69	1.0182
70	0.04304	282.66	308.48	1.0645	0.03634	281.57	307.01	1.0487
80	0.04469	291.86	318.67	1.0938	0.03781	290.88	317.35	1.0784
90	0.04631	301.14	328.93	1.1225	0.03924	300.27	327.74	1.1074
100	0.04790	310.53	339.27	1.1505	0.04064	309.74	338.19	1.1358
110	0.04946	320.03	349.70	1.1781	0.04201	319.31	348.71	1.1637
120	0.05099	329.64	360.24	1.2053	0.04335	328.98	359.33	1.1910
130	0.05251	339.38	370.88	1.2320	0.04468	338.76	370.04	1.2179
140	0.05402	349.23	381.64	1.2584	0.04599	348.66	380.86	1.2444
150	0.05550	359.21	392.52	1.2844	0.04729	358.68	391.79	1.2706
160	0.05698	369.32	403.51	1.3100	0.04857	368.82	402.82	1.2963
$p = 8.0 \text{ bars} = 0.80 \text{ MPa}$ ($T_{\text{sat}} = 31.33^\circ\text{C}$)				$p = 9.0 \text{ bars} = 0.90 \text{ MPa}$ ($T_{\text{sat}} = 35.53^\circ\text{C}$)				
Sat.	0.02547	243.78	264.15	0.9066	0.02255	245.88	266.18	0.9054
40	0.02691	252.13	273.66	0.9374	0.02325	250.32	271.25	0.9217
50	0.02846	261.62	284.39	0.9711	0.02472	260.09	282.34	0.9566
60	0.02992	271.04	294.98	1.0034	0.02609	269.72	293.21	0.9897
70	0.03131	280.45	305.50	1.0345	0.02738	279.30	303.94	1.0214
80	0.03264	289.89	316.00	1.0647	0.02861	288.87	314.62	1.0521
90	0.03393	299.37	326.52	1.0940	0.02980	298.46	325.28	1.0819
100	0.03519	308.93	337.08	1.1227	0.03095	308.11	335.96	1.1109
110	0.03642	318.57	347.71	1.1508	0.03207	317.82	346.68	1.1392
120	0.03762	328.31	358.40	1.1784	0.03316	327.62	357.47	1.1670
130	0.03881	338.14	369.19	1.2055	0.03423	337.52	368.33	1.1943
140	0.03997	348.09	380.07	1.2321	0.03529	347.51	379.27	1.2211
150	0.04113	358.15	391.05	1.2584	0.03633	357.61	390.31	1.2475
160	0.04227	368.32	402.14	1.2843	0.03736	367.82	401.44	1.2735
170	0.04340	378.61	413.33	1.3098	0.03838	378.14	412.68	1.2992
180	0.04452	389.02	424.63	1.3351	0.03939	388.57	424.02	1.3245