

NATIONAL EXAMINATIONS - December 2019

04-BS-10, Thermodynamics

3 Hours Duration


NOTES:

1. If doubt exists as to the interpretation of any question, the candidate is urged to submit, with the answer paper, a clear statement of any assumptions made.
 2. A Casio or Sharp approved calculator is permitted. This is a "Closed-Book" examination with one 8.5×11 inch sheet of notes (both sides) allowed.
 3. Property tables and charts are provided where necessary. **Interpolation is not necessary. The closest tabular value may be used.**
 4. **Two** questions from part "A" plus **four** questions from part "B" (a total of **six** questions) constitutes a complete paper. Unless clearly indicated otherwise by you, only the first two questions from part "A" and the first four questions from part "B" that you answered will be marked.
 5. The mark associated with each question is specified.
-

PART A. DO ONLY TWO OF QUESTIONS 1, 2, or 3
(Each question is worth 20 marks)

1. A power plant operates on an ideal regenerative vapor power cycle with one closed feedwater heater as shown in the figure. Steam enters the first turbine stage at 12.5 MPa, 550°C and expands to 1 MPa, where some of the steam is extracted and diverted to a closed feedwater heater. Condensate exiting the feed-water heater as saturated liquid at 1 MPa passes through a trap into the condenser. The feedwater exits the heater at 12.5 MPa with a temperature of 170°C. The condenser pressure is 5 kPa. Assume a source temperature of 1500 K and a sink temperature of 300 K, and take $T_0 = 300$ K. Sketch the cycle on a T-s diagram with respect to saturation lines and determine

- the net power output, in kJ/kg,
- the thermal efficiency of the cycle,
- the exergy destruction associated with each of the processes and the total exergy destruction of the cycle, in kJ/kg, and
- the second law efficiency of the cycle.

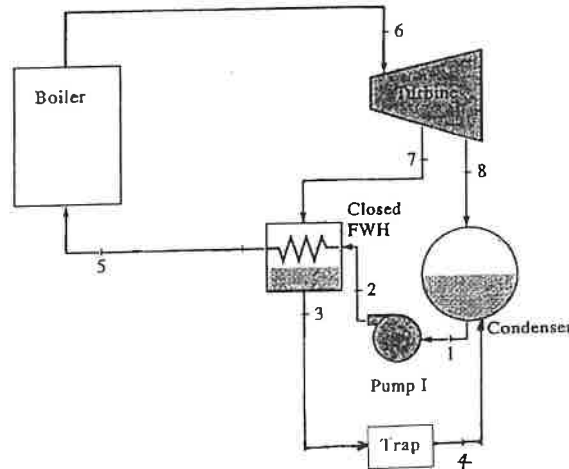


2. Consider a Brayton cycle with reheat using air as the working fluid. Air enters the compressor at 100 kPa and 300 K. Air enters the turbine at 400 kPa and 1200 K, and expands to 100 kPa in two stages. Between the stages, air is reheated at a constant pressure of 200 kPa to 1200 K. Each turbine stage has an isentropic efficiency of 88% and the compressor has an isentropic efficiency of 90%. Assume a source temperature of 1200 K and a sink temperature of 300 K. Show the cycle on a T-s diagram. Assume variable specific heats for air and determine

- the net work output, in kJ/kg,
- the thermal efficiency of the cycle, and
- the second law efficiency of the cycle.

3. The schematic diagram of a vapor-compression system using two evaporators with R-134a as the working fluid is shown below. This arrangement is used to achieve refrigeration at two temperatures with a single compressor and a single condenser. The low-temperature evaporator operates at -18°C with saturated vapor at its exit and has a refrigeration capacity of 3 tons. The high-temperature evaporator produces saturated vapor at 320kPa at its exit and has a refrigeration capacity of 2 tons. Compression is isentropic to the condenser pressure of 1MPa . There are no significant pressure drops in the flows through the condenser and the two evaporators, and the refrigerant leaves the condenser as a saturated liquid at 1MPa . Calculate

- The mass flow rate of refrigerant through each evaporator, in kg/min ,
- The compressor power input, in kW ,
- The rate of heat transfer from the refrigerant passing through the condenser, in kW .

(Note: $1\text{ ton} = 211\text{ kJ}/\text{min}$)

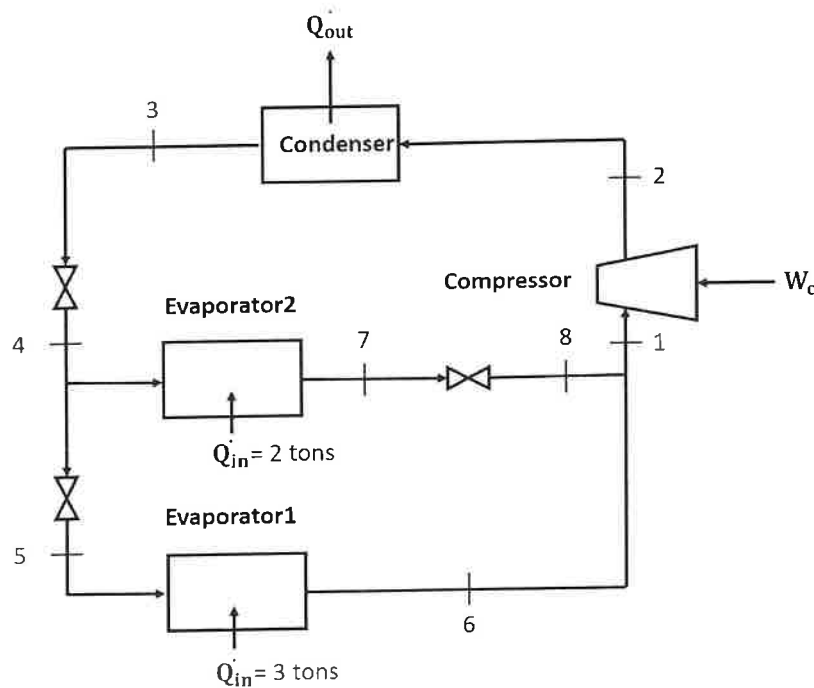

PART B. DO ONLY FOUR OF QUESTIONS 4, 5, 6, 7, 8 or 9

(Each question is worth **15 marks**)

4. Air enters the compressor of an ideal gas refrigeration cycle at 100 kPa and 300 K. The compressor pressure ratio is 3.75, and the temperature at the turbine inlet is 350 K. Show the cycle on a T-s diagram. Determine
- the net work input, in kJ/kg,
 - the refrigeration capacity, in kJ/kg, and
 - the coefficient of performance (COP).
5. A mixture of 80% N₂, and 20% CO₂ gases (by mole numbers), is compressed isentropically in a compressor. The mixture enters the compressor at 100 kPa and 1000 K and leaves at 500 kPa. Assume constant specific heats at room temperature (300 K). Treat the mixture as an ideal gas. Determine the work input to the compressor per unit mass of the mixture.
6. Air at 25°C, 1 atm and 65% relative humidity enters a dehumidifier operating at steady state. Saturated moist air and condensate exit in separate streams, each at 12°C. Neglecting kinetic and potential energy effects, determine
- the heat transfer from the moist air, in kJ per kg of dry air, and
 - the amount of water condensed, in kg per kg of dry air.
7. An air-standard diesel cycle has a compression ratio of 15. At the beginning of compression, $p_1 = 100$ kPa and $T_1 = 300$ K. The maximum temperature in the cycle is 2200 K. If the isentropic compression efficiency is 80% and the isentropic expansion efficiency is 90%, determine
- the net work of the cycle per unit mass of air, in kJ/kg, and
 - the thermal efficiency.
8. Steam enters a heat exchanger operating at steady state at 0.07 MPa with a specific enthalpy of 2431.6 kJ/kg and exits at the same pressure as saturated liquid. The steam mass flow rate is 1.5 kg/min. A separate stream of air with a mass flow rate of 100 kg/min enters at 30°C and exits at 60°C. The ideal gas model with $c_p = 0.1005$ kJ/kg·K can be assumed for air. Kinetic and potential energy effects are negligible. Determine (a) the quality of the entering steam and (b) the rate of heat transfer between the heat exchanger and its surroundings, in kW.
9. A heat pump maintains a dwelling at temperature 20°C when the outside temperature averages 5°C. The heat transfer rate through the walls and roof is 30,000 kJ/h. If the electricity costs 8 cents per kW·h, determine the minimum theoretical operating cost for each day of operation.

APPENDIX – TABLES AND CHART

TABLE A-1	Molar Mass, Gas Constant, and Critical-Point Properties	2
TABLE A-4	Properties of Saturated Water: Temperature Table	3
TABLE A-5	Properties of Saturated Water: Pressure Table	5
TABLE A-6	Properties of Superheated Water	7
TABLE A-7	Properties of Compressed Liquid Water	11
TABLE A-11	Properties of Saturated Refrigerant -34a: Temperature Table	12
TABLE A-12	Properties of saturated Refrigerant-134a: Pressure Table	13
TABLE A-13	Properties of Superheated Refrigerant-134a	14
TABLE A-14	Ideal Gas Specific Heats of Some Common Gases	16
TABLE A-17	Ideal Gas Properties of Nitrogen	17
TABLE A-18	Ideal Gas Properties of Oxygen	18
TABLE A-19	Ideal Gas Properties of Water Vapor	19
TABLE A-22	Ideal Gas Properties of Air	20
CHART	Psychrometric Chart for 1 atm	22

TABLE A-1
Molar mass, gas constant, and critical-point properties

Substance	Formula	Molar mass kg/kmol	R kJ/(kg · K)*	Temperature K	Pressure MPa	Volume m ³ /kmol
Ammonia	NH ₃	17.03	0.4882	405.5	11.28	0.0724
Argon	Ar	39.948	0.2081	151	4.86	0.0749
Bromine	Br ₂	159.808	0.0520	584	10.34	0.1355
Carbon dioxide	CO ₂	44.01	0.1889	304.2	7.39	0.0943
Carbon monoxide	CO	28.011	0.2968	133	3.50	0.0930
Chlorine	Cl ₂	70.906	0.1173	417	7.71	0.1242
Deuterium (normal)	D ₂	4.00	2.0785	38.4	1.66	—
Helium	He	4.003	2.0769	5.3	0.23	0.0578
Hydrogen (normal)	H ₂	2.016	4.1240	33.3	1.30	0.0649
Krypton	Kr	83.80	0.09921	209.4	5.50	0.0924
Neon	Ne	20.183	0.4119	44.5	2.73	0.0417
Nitrogen	N ₂	28.013	0.2968	126.2	3.39	0.0899
Nitrous oxide	N ₂ O	44.013	0.1889	309.7	7.27	0.0961
Oxygen	O ₂	31.999	0.2598	154.8	5.08	0.0780
Sulfur dioxide	SO ₂	64.063	0.1298	430.7	7.88	0.1217
Water	H ₂ O	18.015	0.4615	647.3	22.09	0.0568
Xenon	Xe	131.30	0.06332	289.8	5.88	0.1186
Benzene	C ₆ H ₆	78.115	0.1064	562	4.92	0.2603
n-Butane	C ₄ H ₁₀	58.124	0.1430	425.2	3.80	0.2547
Carbon tetrachloride	CCl ₄	153.82	0.05405	556.4	4.56	0.2759
Chloroform	CHCl ₃	119.38	0.06964	536.6	5.47	0.2403
Dichlorodifluoromethane (R-12)	CCl ₂ F ₂	120.91	0.06876	384.7	4.01	0.2179
Dichlorofluoromethane	CHCl ₂ F	102.92	0.08078	451.7	5.17	0.1973
Ethane	C ₂ H ₆	30.070	0.2765	305.5	4.88	0.1480
Ethyl alcohol	C ₂ H ₅ OH	46.07	0.1805	516	6.38	0.1673
Ethylene	C ₂ H ₄	28.054	0.2964	282.4	5.12	0.1242
n-Hexane	C ₆ H ₁₄	86.178	0.09647	507.9	3.03	0.3677
Methane	CH ₄	16.043	0.5182	191.1	4.64	0.0993
Methyl alcohol	CH ₃ OH	32.042	0.2595	513.2	7.95	0.1180
Methyl chloride	CH ₃ Cl	50.488	0.1647	416.3	6.68	0.1430
Propane	C ₃ H ₈	44.097	0.1885	370	4.26	0.1998
Propene	C ₃ H ₆	42.081	0.1976	365	4.62	0.1810
Propyne	C ₃ H ₄	40.065	0.2075	401	5.35	—
Trichlorofluoromethane	CCl ₃ F	137.37	0.06052	471.2	4.38	0.2478
Air	—	28.97	0.2870	—	—	—

*The unit kJ/(kg · K) is equivalent to kPa · m³/(kg · K). The gas constant is calculated from $R = R_u/M$, where $R_u = 8.314$ kJ/(kmol · K) and M is the molar mass.

Source: Gordon J. Van Wylen and Richard E. Sonntag, *Fundamentals of Classical Thermodynamics*, English/SI Version, 3d ed., Wiley, New York, 1986, p. 685, table A.6SI. Originally published in K. A. Kobe and R. E. Lynn, Jr., *Chemical Review*, vol. 52, pp. 117–236, 1953.

TABLE A-4

Saturated water—Temperature table

Temp., $T, ^\circ\text{C}$	Sat. press., $P_{\text{sat}}, \text{kPa}$	Specific volume, m^3/kg		Internal energy, kJ/kg			Enthalpy, kJ/kg			Entropy, $\text{kJ}/(\text{kg}\cdot\text{K})$		
		Sat. liquid, v_f	Sat. vapor, v_g	Sat. liquid, u_f	Evap., u_{fg}	Sat. vapor, u_g	Sat. liquid, h_f	Evap., h_{fg}	Sat. vapor, h_g	Sat. liquid, s_f	Evap., s_{fg}	Sat. vapor, s_g
0.01	0.6113	0.001000	206.14	0.0	2375.3	2375.3	0.01	2501.3	2501.4	0.000	9.1562	9.1562
5	0.8721	0.001000	147.12	20.97	2361.3	2382.3	20.98	2489.6	2510.6	0.0761	8.9496	9.0257
10	1.2276	0.001000	106.38	42.00	2347.2	2389.2	42.01	2477.7	2519.8	0.1510	8.7498	8.9008
15	1.7051	0.001001	77.93	62.99	2333.1	2396.1	62.99	2465.9	2528.9	0.2245	8.5569	8.7814
20	2.339	0.001002	57.79	83.95	2319.0	2402.9	83.96	2454.1	2538.1	0.2966	8.3706	8.6672
25	3.169	0.001003	43.36	104.88	2304.9	2409.8	104.89	2442.3	2547.2	0.3674	8.1905	8.5580
30	4.246	0.001004	32.89	125.78	2290.8	2416.6	125.79	2430.5	2556.3	0.4369	8.0164	8.4533
35	5.628	0.001006	25.22	146.67	2276.7	2423.4	146.68	2418.6	2565.3	0.5053	7.8478	8.3531
40	7.384	0.001008	19.52	167.56	2262.6	2430.1	167.57	2406.7	2574.3	0.5725	7.6845	8.2570
45	9.593	0.001010	15.26	188.44	2248.4	2436.8	188.45	2394.8	2583.2	0.6387	7.5261	8.1648
50	12.349	0.001012	12.03	209.32	2234.2	2443.5	209.33	2382.7	2592.1	0.7038	7.3725	8.0763
55	15.758	0.001015	9.568	230.21	2219.9	2450.1	230.23	2370.7	2600.9	0.7679	7.2234	7.9913
60	19.940	0.001017	7.671	251.11	2205.5	2456.6	251.13	2358.5	2609.6	0.8312	7.0784	7.9096
65	25.03	0.001020	6.197	272.02	2191.1	2463.1	272.06	2346.2	2618.3	0.8935	6.9375	7.8310
70	31.19	0.001023	5.042	292.95	2176.6	2469.6	292.98	2333.8	2626.8	0.9549	6.8004	7.7553
75	38.58	0.001026	4.131	313.90	2162.0	2475.9	313.93	2321.4	2635.3	1.0155	6.6669	7.6824
80	47.39	0.001029	3.407	334.86	2147.4	2482.2	334.91	2308.8	2643.7	1.0753	6.5369	7.6122
85	57.83	0.001033	2.828	355.84	2132.6	2488.4	355.90	2296.0	2651.9	1.1343	6.4102	7.5445
90	70.14	0.001036	2.361	376.85	2117.7	2494.5	376.92	2283.2	2660.1	1.1925	6.2866	7.4791
95	84.55	0.001040	1.982	397.88	2102.7	2500.6	397.96	2270.2	2668.1	1.2500	6.1659	7.4159
Sat. press., MPa												
100	0.10135	0.001044	1.6729	418.94	2087.6	2506.5	419.04	2257.0	2676.1	1.3069	6.0480	7.3549
105	0.12082	0.001048	1.4194	440.02	2072.3	2512.4	440.15	2243.7	2683.8	1.3630	5.9328	7.2958
110	0.14327	0.001052	1.2102	461.14	2057.0	2518.1	461.30	2230.2	2691.5	1.4185	5.8202	7.2387
115	0.16906	0.001056	1.0366	482.30	2041.4	2523.7	482.48	2216.5	2699.0	1.4734	5.7100	7.1833
120	0.19853	0.001060	0.8919	503.50	2025.8	2529.3	503.71	2202.6	2706.3	1.5276	5.6020	7.1296
125	0.2321	0.001065	0.7706	524.74	2009.9	2534.6	524.99	2188.5	2713.5	1.5813	5.4962	7.0775
130	0.2701	0.001070	0.6685	546.02	1993.9	2539.9	546.31	2174.2	2720.5	1.6344	5.3925	7.0269
135	0.3130	0.001075	0.5822	567.35	1977.7	2545.0	567.69	2159.6	2727.3	1.6870	5.2907	6.9777
140	0.3613	0.001080	0.5089	588.74	1961.3	2550.0	589.13	2144.7	2733.9	1.7391	5.1908	6.9299
145	0.4154	0.001085	0.4463	610.18	1944.7	2554.9	610.63	2129.6	2740.3	1.7907	5.0926	6.8833
150	0.4758	0.001091	0.3928	631.68	1927.9	2559.5	632.20	2114.3	2746.5	1.8418	4.9960	6.8379
155	0.5431	0.001096	0.3468	653.24	1910.8	2564.1	653.84	2098.6	2752.4	1.8925	4.9010	6.7935
160	0.6178	0.001102	0.3071	674.87	1893.5	2568.4	675.55	2082.6	2758.1	1.9427	4.8075	6.7502
165	0.7005	0.001108	0.2727	696.56	1876.0	2572.5	697.34	2066.2	2763.5	1.9925	4.7153	6.7078
170	0.7917	0.001114	0.2428	718.33	1858.1	2576.5	719.21	2049.5	2768.7	2.0419	4.6244	6.6663
175	0.8920	0.001121	0.2168	740.17	1840.0	2580.2	741.17	2032.4	2773.6	2.0909	4.5347	6.6256
180	1.0021	0.001127	0.19405	762.09	1821.6	2583.7	763.22	2015.0	2778.2	2.1396	4.4461	6.5857
185	1.1227	0.001134	0.17409	784.10	1802.9	2587.0	785.37	1997.1	2782.4	2.1879	4.3586	6.5465
190	1.2544	0.001141	0.15654	806.19	1783.8	2590.0	807.62	1978.8	2786.4	2.2359	4.2720	6.5079
195	1.3978	0.001149	0.14105	828.37	1764.4	2592.8	829.98	1960.0	2790.0	2.2835	4.1863	6.4698

TABLE A-4

Saturated water—Temperature table (Concluded)

Temp., T°C	Sat. press., P _{sat} , MPa	Specific volume, m ³ /kg		Internal energy, kJ/kg			Enthalpy, kJ/kg			Entropy, kJ/(kg·K)		
		Sat. liquid, v _f	Sat. vapor, v _g	Sat. liquid, u _f	Evap., u _{fg}	Sat. vapor, u _g	Sat. liquid, h _f	Evap., h _{fg}	Sat. vapor, h _g	Sat. liquid, s _f	Evap., s _{fg}	Sat. vapor, s _g
200	1.5538	0.001157	0.13736	850.65	1744.7	2595.3	852.45	1940.7	2793.2	2.3309	4.1014	6.4323
205	1.7230	0.001164	0.11521	873.04	1724.5	2597.5	875.04	1921.0	2796.0	2.3780	4.0172	6.3952
210	1.9062	0.001173	0.10441	895.53	1703.9	2599.5	897.76	1900.7	2798.5	2.4248	3.9337	6.3585
215	2.104	0.001181	0.09479	918.14	1682.9	2601.1	920.62	1879.9	2800.5	2.4714	3.8507	6.3221
220	2.318	0.001190	0.08619	940.87	1661.5	2602.4	943.62	1858.5	2802.1	2.5178	3.7683	6.2861
225	2.548	0.001199	0.07849	963.73	1639.6	2603.3	966.78	1836.5	2803.3	2.5639	3.6863	6.2503
230	2.795	0.001209	0.07158	986.74	1617.2	2603.9	990.12	1813.8	2804.0	2.6099	3.6047	6.2146
235	3.060	0.001219	0.06537	1009.89	1594.2	2604.1	1013.62	1790.5	2804.2	2.6558	3.5233	6.1791
240	3.344	0.001229	0.05976	1033.21	1570.8	2604.0	1037.32	1766.5	2803.8	2.7015	3.4422	6.1437
245	3.648	0.001240	0.05471	1056.71	1546.7	2603.4	1061.23	1741.7	2803.0	2.7472	3.3612	6.1083
250	3.973	0.001251	0.05013	1080.39	1522.0	2602.4	1085.36	1716.2	2801.5	2.7927	3.2802	6.0730
255	4.319	0.001263	0.04598	1104.28	1496.7	2600.9	1109.73	1689.8	2799.5	2.8383	3.1992	6.0375
260	4.688	0.001276	0.04221	1128.39	1470.6	2599.0	1134.37	1662.5	2796.9	2.8838	3.1181	6.0019
265	5.081	0.001289	0.03877	1152.74	1443.9	2596.6	1159.28	1634.4	2793.6	2.9294	3.0368	5.9662
270	5.499	0.001302	0.03564	1177.36	1416.3	2593.7	1184.51	1605.2	2789.7	2.9751	2.9551	5.9301
275	5.942	0.001317	0.03279	1202.25	1387.9	2590.2	1210.07	1574.9	2785.0	3.0208	2.8730	5.8938
280	6.412	0.001332	0.03017	1227.46	1358.7	2586.1	1235.99	1543.6	2779.6	3.0668	2.7903	5.8571
285	6.909	0.001348	0.02777	1253.00	1328.4	2581.4	1262.31	1511.0	2773.3	3.1130	2.7070	5.8199
290	7.436	0.001366	0.02557	1278.92	1297.1	2576.0	1289.07	1477.1	2766.2	3.1594	2.6227	5.7821
295	7.993	0.001384	0.02354	1305.2	1264.7	2569.9	1316.3	1441.8	2758.1	3.2062	2.5375	5.7437
300	8.581	0.001404	0.02167	1332.0	1231.0	2563.0	1344.0	1404.9	2749.0	3.2534	2.4511	5.7045
305	9.202	0.001425	0.019948	1359.3	1195.9	2555.2	1372.4	1366.4	2738.7	3.3010	2.3633	5.6643
310	9.856	0.001447	0.018350	1387.1	1159.4	2546.4	1401.3	1326.0	2727.3	3.3493	2.2737	5.6230
315	10.547	0.001472	0.016867	1415.5	1121.1	2536.6	1431.0	1283.5	2714.5	3.3982	2.1821	5.5804
320	11.274	0.001499	0.015488	1444.6	1080.9	2525.5	1461.5	1238.6	2700.1	3.4480	2.0882	5.5362
325	12.045	0.001529	0.014219	1474.4	1039.9	2513.5	1493.0	1190.6	2684.9	3.4987	1.9919	5.4917
330	12.845	0.001561	0.012996	1505.3	993.7	2498.9	1525.3	1140.6	2665.9	3.5507	1.8909	5.4417
335	13.675	0.001596	0.011919	1538.1	949.4	2483.0	1559.2	1087.9	2645.0	3.6040	1.7863	5.3917
340	14.536	0.001633	0.010979	1570.3	894.3	2464.6	1594.2	1027.9	2622.0	3.6594	1.6763	5.3357
345	15.428	0.001673	0.010159	1601.9	831.6	2441.8	1630.6	953.4	2597.9	3.7171	1.5535	5.2757
350	16.513	0.001714	0.008813	1641.9	776.6	2418.4	1670.6	893.4	2563.9	3.7777	1.4335	5.2112
355	17.702	0.001758	0.007500	1681.2	726.3	2391.5	1710.5	820.3	2481.0	3.8417	1.3179	5.1412
360	18.651	0.001803	0.006945	1725.2	626.3	2351.5	1760.5	720.3	2481.0	3.9147	1.1379	5.0526
365	19.372	0.001851	0.006925	1774.0	506.3	2288.5	1890.5	441.6	2332.1	4.1106	0.6865	4.7971
370	21.03	0.002213	0.004925	1844.0	384.5	2228.5	1890.5	0	2099.3	4.4298	0	4.4298
374.14	22.09	0.003155	0.003155	2029.6	0	2029.6	2099.3	0	2099.3	4.4298	0	4.4298

Source: Tables A-4 through A-8 are adapted from Gordon J. Van Wylen and Richard E. Sonntag, *Fundamentals of Classical Thermodynamics*, English/SI Version, 3rd ed. (New York: John Wiley & Sons, 1988), pp. 635-651. Originally published in Joseph H. Keenan, Frederick G. Keyes, Philip G. Hill, and Joan G. Moore, *Steam Tables, SI Units* (New York: John Wiley & Sons, 1978).

TABLE A-5

Saturated water—Pressure table

Press., MPa	Sat. temp., T _{sat} , °C	Specific volume, m ³ /kg		Internal energy, kJ/kg			Enthalpy, kJ/kg			Entropy, kJ/(kg·K)		
		Sat. liquid, v _f	Sat. vapor, v _g	Sat. liquid, u _f	Evap., u _{fg}	Sat. vapor, u _g	Sat. liquid, h _f	Evap., h _{fg}	Sat. vapor, h _g	Sat. liquid, s _f	Evap., s _{fg}	Sat. vapor, s _g
0.0113	0.01	0.001000	206.14	-0.00	2375.3	2375.3	0.01	2501.3	2501.4	0.0000	9.1562	9.1662
1.0	6.98	0.001000	129.21	29.30	2355.7	2385.0	29.30	2484.9	2514.2	0.1059	8.8697	8.9758
1.5	13.03	0.001001	87.98	54.71	2338.6	2393.3	54.71	2470.6	2525.3	0.1957	8.6322	8.8279
2.0	17.50	0.001001	67.00	73.48	2326.0	2399.5	73.48	2460.0	2533.5	0.2607	8.4629	8.7237
2.5	21.08	0.001002	54.25	88.48	2315.9	2404.4	88.49	2451.6	2540.0	0.3120	8.3311	8.6432
3.0	24.08	0.001003	45.67	101.04	2307.5	2408.5	101.05	2444.5	2545.5	0.3545	8.2231	8.5776
4.0	28.96	0.001004	34.80	121.45	2293.7	2415.2	121.46	2432.9	2554.4	0.4226	8.0520	8.4746
5.0	32.88	0.001005	28.19	137.81	2282.7	2420.5	137.82	2423.7	2561.5	0.4764	7.9187	8.3951
7.5	40.29	0.001008	19.24	168.78	2261.7	2430.5	168.79	2406.0	2574.8	0.5764	7.6750	8.2515
10	45.81	0.001010	14.67	191.82	2246.1	2437.9	191.83	2392.8	2584.7	0.6493	7.5009	8.1502
15	53.97	0.001014	10.02	225.92	2222.8	2448.7	225.94	2373.1	2599.1	0.7549	7.2536	8.0085
20	60.06	0.001017	7.649	251.38	2205.4	2456.7	251.40	2358.3	2609.7	0.8320	7.0766	7.8065
25	64.97	0.001020	6.204	271.90	2191.2	2463.1	271.93	2346.3	2618.2	0.8931	6.9383	7.6314
30	69.10	0.001022	5.229	289.20	2179.2	2468.4	289.23	2336.1	2625.3	0.9439	6.8247	7.4686
40	75.87	0.001027	3.993	317.53	2159.5	2477.0	317.58	2319.2	2636.8	1.0259	6.6441	7.2700
50	81.33	0.001030	3.240	340.44	2143.4	2483.9	340.49	2305.4	2645.9	1.0910	6.5029	7.0939
75	91.78	0.001037	2.217	384.31	2112.4	2496.7	384.39	2278.6	2663.0	1.2130	6.2434	7.4584
0.100	99.63	0.001043	1.6940	417.36	2088.7	2506.1	417.46	2258.0	2675.5	1.3026	6.0568	7.3594
0.125	105.99	0.001048	1.3749	444.19	2069.3	2513.5	444.32	2241.0	2685.4	1.3740	5.9104	7.2644
0.150	111.37	0.001053	1.1593	466.94	2052.7	2519.7	467.11	2226.5	2693.6	1.4336	5.7897	7.2233
0.175	116.06	0.001057	1.0036	486.80	2038.1	2524.9	488.99	2213.6	2700.6	1.4849	5.6968	7.1717
0.200	120.23	0.001061	0.8857	504.49	2025.0	2529.6	504.70	2201.9	2706.7	1.5301	5.5970	7.1271
0.225	124.00	0.001064	0.7933	520.47	2013.1	2533.6	520.72	2191.3	2712.1	1.5706	5.5173	7.0878
0.250	127.44	0.001067	0.7187	535.10	2002.1	2537.2	535.37	2181.5	2716.9	1.6072	5.4455	7.0527
0.275	130.60	0.001070	0.6573	548.59	1991.9	2540.5	548.89	2172.4	2721.3	1.6408	5.3801	7.0209
0.300	133.65	0.001073	0.6058	561.15	1982.4	2543.6	561.47	2163.8	2725.3	1.6718	5.3201	6.9919
0.325	136.30	0.001076	0.5620	572.90	1973.5	2546.4	573.25	2155.8	2729.0	1.7006	5.2648	6.9652
0.350	138.88	0.001079	0.5243	583.95	1965.0	2548.9	584.33	2148.1	2732.4	1.7275	5.2130	6.9405
0.375	141.32	0.001081	0.4914	594.40	1956.9	2551.3	594.81	2140.8	2735.6	1.7528	5.1647	6.9176
0.40	143.63	0.001084	0.4625	604.31	1949.3	2553.6	604.74	2133.9	2738.6	1.7766	5.1193	6.8959
0.45	147.83	0.001088	0.4140	622.77	1934.9	2557.6	623.25	2120.7	2743.9	1.8207	5.0359	6.8565
0.50	151.86	0.001093	0.3749	639.68	1921.6	2561.2	640.23	2108.5	2748.7	1.8607	4.9606	6.8213
0.55	155.48	0.001097	0.3427	655.32	1909.2	2564.5	665.93	2097.0	2756.8	1.8973	4.8920	6.7893
0.60	158.85	0.001101	0.3157	669.90	1897.5	2567.4	670.58	2086.3	2756.8	1.9312	4.8288	6.7600
0.65	162.01	0.001104	0.2927	683.56	1886.5	2570.1	684.28	2076.0	2760.3	1.9627	4.7703	6.7331
0.70	164.97	0.001108	0.2729	696.44	1876.1	2572.5	697.22	2066.3	2763.5	1.9922	4.7158	6.7090
0.75	167.78	0.001112	0.2558	708.64	1866.1	2574.7	709.47	2057.0	2766.4	2.0200	4.6647	6.6847
0.80	170.43	0.001116	0.2404	720.22	1856.6	2576.8	721.11	2048.0	2769.1	2.0462	4.6166	6.6628
0.85	172.96	0.001118	0.2270	731.27	1847.4	2578.7	732.22	2039.4	2771.6	2.0710	4.5711	6.6421
0.90	175.38	0.001121	0.2150	741.83	1838.6	2580.5	742.83	2031.1	2773.9	2.0946	4.5280	6.6226
0.95	177.69	0.001124	0.2042	751.95	1830.2	2582.1	753.02	2023.1	2776.1	2.1172	4.4869	6.6041
1.00	179.91	0.001127	0.19444	761.68	1822.0	2583.6	762.81	2015.3	2778.1	2.1387	4.4478	6.5865
1.10	184.09	0.001133	0.17763	780.09	1806.3	2586.4	781.34	2000.4	2871.7	2.1792	4.3744	6.5536
1.20	187.99	0.001139	0.16333	797.29	1791.5	2588.8	798.65	1986.2	2784.8	2.2166	4.3057	6.5233
1.30	191.64	0.001144	0.15125	813.44	1777.5	2591.0	814.93	1972.7	2787.6	2.2515	4.2438	6.4953

TABLE A-5

Saturated water—Pressure table (Concluded)

Press., PMPa	Sat. temp., T_{sat} °C	Specific volume, m^3/kg		Internal energy, kJ/kg			Enthalpy, kJ/kg			Entropy, kJ/(kg·K)		
		Sat. liquid, v_f	Sat. vapor, v_g	Sat. liquid, u_f	Evap., u_{fg}	Sat. vapor, u_g	Sat. liquid, h_f	Evap., h_{fg}	Sat. vapor, h_g	Sat. liquid, s_f	Evap., s_{fg}	Sat. vapor, s_g
1.40	195.07	0.001149	0.14084	828.70	1764.1	2592.8	830.30	1957.7	2790.0	2.2842	4.1850	6.4693
1.50	198.32	0.001154	0.13177	843.16	1751.3	2594.5	844.89	1947.3	2792.2	2.3150	4.1298	6.4448
1.75	205.76	0.001166	0.11349	876.46	1721.4	2597.8	878.50	1917.9	2796.4	2.3851	4.0044	6.3896
2.00	212.42	0.001177	0.09963	906.44	1693.8	2600.3	908.79	1890.7	2799.5	2.4474	3.8935	6.3409
2.25	218.45	0.001187	0.08875	933.83	1668.2	2602.0	936.49	1865.2	2801.7	2.5035	3.7937	6.2972
2.5	223.99	0.001197	0.07998	959.11	1644.0	2603.1	962.11	1841.0	2803.1	2.5547	3.7028	6.2575
3.0	233.90	0.001217	0.06668	1004.78	1599.3	2604.1	1008.42	1795.7	2804.2	2.6457	3.5412	6.1869
3.5	242.60	0.001235	0.05707	1045.43	1558.3	2603.7	1049.75	1753.7	2803.4	2.7253	3.4000	6.1253
4	250.40	0.001252	0.04978	1082.31	1520.0	2602.3	1087.31	1714.1	2801.4	2.7964	3.2737	6.0701
5	263.99	0.001286	0.03944	1147.81	1449.3	2597.1	1154.23	1640.1	2794.3	2.9202	3.0532	5.9734
6	275.64	0.001319	0.03244	1205.44	1384.3	2589.7	1213.35	1571.0	2784.3	3.0267	2.8625	5.8892
7	285.88	0.001351	0.02737	1257.55	1323.0	2580.5	1267.00	1505.1	2772.1	3.1211	2.6922	5.8133
8	295.06	0.001384	0.02352	1305.57	1264.2	2569.8	1316.64	1441.3	2758.0	3.2068	2.5364	5.7432
9	303.40	0.001418	0.02048	1350.51	1207.3	2557.8	1363.26	1378.9	2742.1	3.2858	2.3915	5.6722
10	311.06	0.001452	0.018026	1393.04	1151.4	2544.4	1407.56	1317.1	2724.7	3.3596	2.2544	5.6141
11	318.15	0.001489	0.015987	1433.7	1096.0	2529.8	1450.1	1255.5	2705.6	3.4295	2.1233	5.5527
12	324.75	0.001527	0.014263	1473.0	1040.7	2513.7	1491.3	1193.3	2684.9	3.4962	1.9962	5.4924
13	330.93	0.001567	0.012780	1511.1	985.0	2496.1	1531.5	1130.7	2662.2	3.5606	1.8718	5.4323
14	336.75	0.001611	0.011485	1548.6	928.2	2476.8	1571.1	1066.5	2637.6	3.6232	1.7485	5.3717
15	342.24	0.001658	0.010337	1585.6	869.8	2455.5	1610.5	1000.0	2610.5	3.6848	1.6249	5.3098
16	347.44	0.001711	0.009306	1622.7	809.0	2431.7	1650.1	930.6	2580.6	3.7461	1.4994	5.2455
17	352.37	0.001770	0.008364	1660.2	744.8	2405.0	1690.3	856.9	2547.2	3.8079	1.3698	5.1777
18	357.06	0.001840	0.007489	1698.9	675.4	2374.3	1732.0	777.1	2509.1	3.8715	1.2329	5.1044
19	361.54	0.001924	0.006657	1739.9	598.1	2338.1	1776.5	688.0	2464.5	3.9388	1.0839	5.0228
20	365.81	0.002036	0.005834	1785.6	507.5	2293.0	1826.3	583.4	2409.7	4.0139	0.9130	4.9269
21	369.89	0.002207	0.004952	1842.1	388.5	2230.6	1888.4	446.2	2334.6	4.1075	0.6938	4.8013
22	373.80	0.002742	0.003568	1961.9	125.2	2087.1	2022.2	143.4	2165.6	4.3110	0.2216	4.5327
22.09	374.14	0.003155	0.003155	2029.6	0	2029.6	2099.3	0	2099.3	4.4298	0	4.4298

TABLE A-6

Superheated water¹

T, °C	v, m ³ /kg	u, kJ/kg	h, kJ/kg	s, kJ/(kg·K)	v, m ³ /kg	u, kJ/kg	h, kJ/kg	s, kJ/(kg·K)	v, m ³ /kg	u, kJ/kg	h, kJ/kg	s, kJ/(kg·K)
P = 0.01 MPa (45.81°C)*				P = 0.05 MPa (81.33°C)				P = 0.10 MPa (99.63°C)				
Sat.	14.674	2437.9	2584.7	8.1502	3.240	2463.9	2645.9	7.5939	1.6940	2506.1	2675.5	7.3594
50	14.869	2443.9	2592.6	8.1749	3.418	2511.6	2682.5	7.6947	1.6958	2508.7	2676.2	7.3614
100	17.196	2515.5	2687.5	8.4479	3.889	2585.6	2780.1	7.9401	1.9364	2582.8	2776.4	7.6134
150	19.512	2587.9	2783.0	8.6882	4.356	2659.9	2877.7	8.1580	2.172	2658.1	2875.3	7.8343
200	21.825	2661.3	2879.5	8.9038	4.820	2735.0	2976.0	8.3556	2.406	2733.7	2974.3	8.0333
250	24.136	2736.0	2977.3	9.1002	5.284	2811.3	3075.5	8.5373	2.639	2810.4	3074.3	8.2158
300	26.445	2812.1	3076.5	9.2813	5.749	2888.5	3178.8	8.6942	3.003	2997.9	3278.2	8.5435
400	31.063	2968.9	3279.6	9.6077	6.209	2968.5	3278.8	8.8642	3.565	3131.6	3488.1	9.0976
500	35.679	3132.3	3489.1	9.8978	7.134	3132.0	3488.7	9.1546	4.028	3301.9	3704.4	9.3398
600	40.295	3302.5	3705.4	10.1608	8.057	3302.2	3705.1	9.4178	4.490	3479.2	3928.2	9.5652
700	44.911	3479.6	3928.7	10.4028	8.981	3479.4	3928.5	9.6599	4.952	3663.6	4158.6	9.7767
800	49.526	3663.8	4159.0	10.6281	9.904	3663.6	4158.9	9.8852	5.414	3854.8	4396.1	9.9764
900	54.141	3855.0	4396.4	10.8396	10.828	3854.9	4396.3	10.0967	5.875	4052.8	4640.3	10.1659
1000	58.757	4053.0	4640.6	11.0393	11.751	4052.9	4640.5	10.2964	6.337	4257.3	4891.0	10.3463
1100	63.372	4257.5	4891.2	11.2287	12.674	4257.4	4891.1	10.4859	6.799	4467.7	5147.6	10.5183
1200	67.987	4467.9	5147.8	11.4091	13.597	4467.8	5147.7	10.6662	7.260	4683.5	5409.5	
1300	72.602	4683.7	5409.7	11.5811	14.521	4683.6	5409.6	10.8382				
P = 0.20 MPa (120.23°C)				P = 0.30 MPa (133.55°C)				P = 0.40 MPa (143.63°C)				
Sat.	0.8857	2529.5	2706.7	7.1272	0.6058	2543.6	2725.3	6.9919	0.4825	2553.6	2738.6	6.8959
150	0.9596	2576.9	2768.8	7.2795	0.6339	2570.8	2761.0	7.0778	0.4708	2564.5	2752.8	6.9299
200	1.0803	2654.4	2870.5	7.5068	0.7163	2650.7	2865.6	7.3115	0.5342	2648.8	2860.5	7.1706
250	1.1988	2731.2	2971.0	7.7086	0.7964	2728.7	2967.6	7.5166	0.5951	2726.1	2984.2	7.3789
300	1.3162	2808.6	3071.8	7.8926	0.8763	2806.7	3069.3	7.7022	0.6548	2804.8	3066.8	7.6662
400	1.5493	2966.7	3276.8	8.2218	1.0315	2965.6	3275.0	8.0330	0.7726	2964.4	3273.4	7.8985
500	1.7814	3130.8	3487.1	8.5133	1.1867	3130.0	3486.0	8.3251	0.8893	3129.2	3484.9	8.1913
600	2.013	3301.4	3704.0	8.7770	1.3414	3300.8	3703.2	8.5892	1.0055	3300.2	3702.4	8.4558
700	2.244	3478.8	3927.6	9.0194	1.4957	3478.4	3927.1	8.8319	1.1215	3477.9	3928.6	8.6987
800	2.475	3663.1	4158.2	9.2449	1.6499	3662.9	4157.8	9.0576	1.2372	3662.4	4157.3	8.9244
900	2.705	3854.5	4395.8	9.4566	1.8041	3854.2	4395.4	9.2692	1.3529	3853.9	4395.1	9.1362
1000	2.937	4052.5	4640.0	9.6563	1.9581	4052.3	4639.7	9.4690	1.4685	4052.0	4639.4	9.3360
1100	3.168	4257.0	4890.7	9.8458	2.1121	4256.8	4890.4	9.6585	1.5840	4256.5	4890.2	9.5256
1200	3.399	4467.5	5147.5	10.0262	2.2661	4467.2	5147.1	9.8389	1.6990	4467.0	5148.8	9.7060
1300	3.630	4683.2	5409.3	10.1982	2.4201	4683.0	5409.0	10.0110	1.8151	4682.8	5409.8	9.8780
P = 0.50 MPa (151.86°C)				P = 0.60 MPa (158.85°C)				P = 0.80 MPa (170.43°C)				
Sat.	0.3749	2561.2	2748.7	6.8213	0.3157	2567.4	2756.8	6.7600	0.2404	2576.8	2769.1	6.6628
200	0.4249	2642.9	2855.4	7.0592	0.3520	2638.9	2850.1	6.9685	0.2608	2630.6	2839.3	6.8158
250	0.4744	2723.5	2960.7	7.2709	0.3938	2720.9	2957.2	7.1816	0.2931	2715.5	2950.0	7.0384
300	0.5226	2802.9	3064.2	7.4599	0.4344	2801.0	3061.5	7.3724	0.3241	2797.2	3058.5	7.2328
350	0.5701	2882.6	3167.7	7.6329	0.4742	2881.2	3165.7	7.5464	0.3544	2878.2	3161.7	7.4089
400	0.6173	2963.2	3271.9	7.7938	0.5137	2962.1	3270.3	7.7079	0.3843	2959.7	3267.1	7.5718
500	0.7109	3128.4	3483.9	8.0873	0.5920	3127.6	3482.8	8.0021	0.4433	3128.0	3480.6	7.8673
600	0.8041	3299.6	3701.7	7.3522	0.6697	3289.1	3700.9	8.2674	0.5018	3297.9	3699.4	8.1333
700	0.8969	3477.5	3925.9	8.5952	0.7472	3477.0	3925.3	8.5107	0.5601	3476.2	3924.2	8.3770
800	0.9896	3662.1	4156.9	8.8211	0.8245	3661.8	4156.5	8.7367	0.6181	3661.1	4155.5	8.6033
900	1.0822	3853.6	4394.7	9.0329	0.9017	3853.4	4394.4	8.9488	0.6761	3852.8	4393.7	8.8153
1000	1.1747	4051.8	4639.1	9.2328	0.9788	4051.5	4638.8	9.1485	0.7340	4051.0	4638.2	9.0153
1100	1.2672	4256.3	4889.9	9.4224	1.0559	4256.1	4889.6	9.3381	0.7919	4255.6	4889.1	9.2050
1200	1.3596	4466.8	5146.6	9.6029	1.1330	4466.5	5146.3	9.5185	0.8497	4466.1	5145.9	9.3855
1300	1.4521	4682.5	5408.6	9.7749	1.2101	4682.3	5408.3	9.6906	0.9076	4681.8	5407.9	9.5575

*The temperature in parentheses is the saturation temperature at the specified pressure.
¹Properties of saturated vapor at the specified pressure.

TABLE A-6

Superheated water (Continued)

T °C	v m ³ /kg	u kJ/kg	h kJ/kg	s kJ/(kg·K)	v m ³ /kg	u kJ/kg	h kJ/kg	s kJ/(kg·K)	v m ³ /kg	u kJ/kg	h kJ/kg	s kJ/(kg·K)
P = 1.00 MPa (170.91°C)				P = 1.20 MPa (187.99°C)				P = 1.40 MPa (195.07°C)				
Sat.	0.19444	2583.6	2778.1	6.5865	0.16333	2588.8	2784.8	6.5233	0.14084	2592.8	2790.0	6.4693
200	0.2060	2621.9	2827.9	6.6940	0.16930	2612.8	2815.9	6.5898	0.14302	2603.1	2803.3	6.4975
250	0.2327	2709.9	2942.6	6.9247	0.19234	2704.2	2935.0	6.8294	0.16350	2698.3	2927.2	6.7467
300	0.2579	2793.2	3051.2	7.1229	0.2138	2789.2	3045.8	7.0317	0.18228	2785.2	3040.4	6.9534
350	0.2825	2875.2	3157.7	7.3011	0.2345	2872.2	3153.6	7.2121	0.2003	2869.2	3149.5	7.1360
400	0.3066	2957.3	3263.9	7.4651	0.2548	2954.9	3260.7	7.3774	0.2178	2952.5	3257.5	7.3026
500	0.3541	3124.4	3478.5	7.7622	0.2946	3122.8	3476.3	7.6759	0.2521	3121.1	3474.1	7.6027
600	0.4011	3296.8	3697.9	8.0290	0.3339	3295.6	3696.3	7.9435	0.2860	3294.4	3694.8	7.8710
700	0.4478	3475.3	3923.1	8.2731	0.3729	3474.4	3922.0	8.1881	0.3195	3473.6	3920.8	8.1160
800	0.4943	3660.4	4154.7	8.4998	0.4118	3659.7	4153.8	8.4148	0.3528	3659.0	4153.0	8.3431
900	0.5407	3852.2	4392.8	8.7118	0.4505	3851.6	4392.2	8.6272	0.3881	3851.1	4391.5	8.5558
1000	0.5871	4050.5	4637.6	8.9119	0.4892	4050.0	4637.0	8.8274	0.4192	4049.5	4636.4	8.7559
1100	0.6335	4255.1	4888.6	9.1017	0.5278	4254.6	4888.0	9.0172	0.4524	4254.1	4887.5	8.9457
1200	0.6798	4465.6	5145.4	9.2822	0.5665	4465.1	5144.9	9.1977	0.4855	4464.7	5144.4	9.1262
1300	0.7261	4681.3	5407.4	9.4543	0.6051	4680.9	5407.0	9.3698	0.5186	4680.4	5406.5	9.2984
P = 1.60 MPa (201.41°C)				P = 1.80 MPa (207.15°C)				P = 2.00 MPa (212.42°C)				
Sat.	0.12380	2596.0	2794.0	6.4218	0.11042	2598.4	2797.1	6.3794	0.09963	2600.3	2799.5	6.3409
225	0.13287	2644.7	2857.3	6.5518	0.11873	2636.6	2846.7	6.4808	0.10377	2628.3	2835.8	6.4147
250	0.14184	2692.3	2919.2	6.6732	0.12497	2686.0	2911.0	6.6066	0.11144	2679.8	2902.5	6.5453
300	0.15882	2781.1	3034.8	6.8844	0.14021	2776.9	3029.2	6.8226	0.12547	2772.6	3023.5	6.7664
350	0.17456	2868.1	3145.4	7.0694	0.15457	2863.0	3141.2	7.0100	0.13857	2859.8	3137.0	6.9563
400	0.19005	2950.1	3254.2	7.2374	0.16847	2947.7	3250.9	7.1794	0.15120	2945.2	3247.6	7.1271
500	0.2203	3119.5	3472.0	7.5390	0.19550	3117.9	3469.8	7.4825	0.17588	3116.2	3467.8	7.4317
600	0.2500	3293.3	3693.2	7.8080	0.2220	3292.1	3691.7	7.7523	0.19960	3290.9	3690.1	7.7024
700	0.2784	3472.7	3919.7	8.0535	0.2482	3471.8	3918.5	7.9983	0.2232	3470.9	3917.4	7.9487
800	0.3086	3658.3	4152.1	8.2808	0.2742	3657.8	4151.2	8.2258	0.2487	3657.0	4150.3	8.1765
900	0.3377	3850.5	4390.8	8.4935	0.3001	3849.9	4390.1	8.4386	0.2700	3849.3	4389.4	8.3895
1000	0.3668	4049.0	4635.8	8.6938	0.3260	4048.5	4635.2	8.6391	0.2933	4048.0	4634.6	8.5901
1100	0.3958	4253.7	4887.0	8.8837	0.3518	4253.2	4886.4	8.8290	0.3166	4252.7	4885.9	8.7800
1200	0.4248	4464.2	5143.9	9.0643	0.3776	4463.7	5143.4	9.0096	0.3398	4463.3	5142.9	8.9607
1300	0.4538	4679.9	5406.0	9.2364	0.4034	4679.5	5405.6	9.1818	0.3631	4678.0	5405.1	9.1329
P = 2.50 MPa (223.89°C)				P = 3.00 MPa (233.80°C)				P = 3.50 MPa (242.86°C)				
Sat.	0.07898	2603.1	2803.1	6.2575	0.06668	2604.1	2804.2	6.1869	0.05707	2603.7	2803.4	6.1253
225	0.08027	2605.8	2806.3	6.2639	0.07058	2644.0	2855.8	6.2872	0.05872	2623.7	2829.2	6.1749
250	0.08700	2662.6	2880.1	6.4085	0.08114	2750.1	2993.5	6.5390	0.06842	2738.0	2977.5	6.4461
300	0.09890	2781.8	3008.8	6.6438	0.09053	2843.7	3115.3	6.7428	0.07678	2835.3	3104.0	6.6579
350	0.10978	2851.9	3128.3	6.8403	0.09936	2932.8	3230.9	6.9212	0.08453	2928.4	3222.3	6.8405
400	0.12010	2939.1	3239.3	7.0148	0.09936	2932.8	3230.9	6.9212	0.09196	3015.3	3337.2	7.0052
450	0.13014	3025.5	3350.8	7.1746	0.10787	3020.4	3344.0	7.0834	0.09918	3103.0	3450.9	7.1572
500	0.13993	3112.1	3462.1	7.3234	0.11619	3108.0	3458.5	7.2338	0.11324	3202.1	3578.4	7.4339
600	0.15930	3288.0	3688.3	7.5960	0.13243	3285.0	3682.3	7.5065	0.12899	3464.3	3908.8	7.8837
700	0.17832	3468.7	3914.5	7.8435	0.14838	3468.5	3911.7	7.7571	0.14058	3651.8	4143.7	7.9134
800	0.19716	3655.3	4148.2	8.0720	0.16414	3653.5	4145.9	7.9862	0.15402	3845.0	4384.1	8.1276
900	0.21590	3847.9	4387.6	8.2853	0.17980	3848.5	4385.9	8.1999	0.16743	4044.1	4630.1	8.3288
1000	0.2346	4046.7	4633.1	8.4861	0.19541	4045.4	4631.6	8.4009	0.18080	4249.2	4881.9	8.5192
1100	0.2532	4251.5	4884.6	8.6762	0.21098	4250.3	4883.3	8.5912	0.19415	4459.8	5139.3	8.7000
1200	0.2718	4462.1	5141.7	8.8569	0.22652	4460.9	5140.5	8.7720	0.20749	4675.5	5401.7	8.8723
1300	0.2905	4677.8	5404.0	9.0291	0.24206	4678.6	5402.8	8.9442				

TABLE A-6

Superheated water (Continued)

T °C	v m ³ /kg	u kJ/kg	h kJ/kg	s kJ/(kg·K)	v m ³ /kg	u kJ/kg	h kJ/kg	s kJ/(kg·K)	P = 5.0 MPa (263.99°C)			
									v m ³ /kg	u kJ/kg	h kJ/kg	s kJ/(kg·K)
P = 4.0 MPa (250.40°C)					P = 4.5 MPa (257.49°C)							
Sat.	0.04978	2802.3	2801.4	6.0701	0.04406	2600.1	2798.3	6.0198	0.03944	2597.1	2794.3	5.9734
275	0.05457	2667.9	2886.2	6.2285	0.04730	2650.3	2863.2	6.1401	0.04141	2631.3	2838.3	6.0544
300	0.05884	2725.3	2960.7	6.3615	0.05135	2712.0	2943.1	6.2828	0.04532	2698.0	2924.5	6.2084
350	0.06645	2826.7	3092.5	6.5821	0.05840	2817.8	3080.6	6.5131	0.05194	2808.7	3068.4	6.4493
400	0.07341	2919.9	3213.6	7.7690	0.06475	2913.3	3204.7	6.7047	0.05781	2906.6	3195.7	6.6459
450	0.08002	3010.2	3330.3	6.9363	0.07074	3005.0	3323.3	6.8746	0.06330	2999.7	3316.2	6.8186
500	0.08643	3099.5	3445.3	7.0901	0.07651	3095.3	3439.6	7.0301	0.06857	3091.0	3433.8	6.9759
600	0.09885	3279.1	3674.4	7.3688	0.08765	3276.0	3670.5	7.3110	0.07869	3273.0	3666.5	7.2589
700	0.11095	3462.1	3905.9	7.6198	0.09847	3469.9	3903.0	7.5631	0.08849	3457.6	3900.1	7.5122
800	0.12287	3650.0	4141.5	7.8502	0.10911	3648.3	4139.3	7.7942	0.09811	3648.6	4137.1	7.7440
900	0.13469	3843.6	4382.3	8.0647	0.11965	3842.2	4390.6	8.0991	0.10762	3840.7	4378.8	7.9593
1000	0.14645	4042.9	4628.7	8.2662	0.13013	4041.6	4627.2	8.2108	0.11707	4040.4	4625.7	8.1812
1100	0.15817	4248.0	4880.6	8.4587	0.14056	4246.8	4879.3	8.4015	0.12648	4245.6	4878.0	8.3520
1200	0.16987	4458.6	5138.1	8.6376	0.15098	4457.5	5136.9	8.5825	0.13587	4456.3	5135.7	8.5331
1300	0.18156	4674.3	5400.5	8.8100	0.16139	4673.1	5399.4	8.7549	0.14526	4672.0	5398.2	8.7055
P = 6.0 MPa (275.64°C)					P = 7.0 MPa (285.86°C)					P = 8.0 MPa (293.06°C)		
Sat.	0.03244	2589.7	2784.3	5.8892	0.02737	2580.5	2772.1	5.8133	0.02352	2569.8	2758.0	5.7432
300	0.03616	2667.2	2884.2	6.0674	0.02947	2632.2	2838.4	5.9305	0.02426	2590.9	2785.0	5.7906
350	0.04223	2789.6	3043.0	6.3335	0.03524	2789.4	3016.0	6.2283	0.02995	2747.7	2987.3	6.1301
400	0.04739	2892.9	3177.2	6.5408	0.03993	2878.6	3158.1	6.4478	0.03432	2863.8	3138.3	6.3834
450	0.05214	2988.9	3301.8	6.7193	0.04416	2978.0	3287.1	6.6327	0.03817	2966.7	3272.0	6.5551
500	0.05665	3082.2	3422.2	6.8803	0.04814	3073.4	3410.3	6.7975	0.04175	3064.3	3398.3	6.7240
550	0.06101	3174.6	3540.6	7.0288	0.05195	3167.2	3530.9	6.9486	0.04516	3159.8	3521.0	6.8778
600	0.06525	3266.9	3658.4	7.1677	0.05565	3260.7	3650.3	7.0894	0.04845	3254.4	3642.0	7.0206
700	0.07352	3453.1	3894.2	7.4234	0.06283	3448.5	3888.3	7.3476	0.05481	3443.9	3862.4	7.2812
800	0.08160	3643.1	4132.7	7.6566	0.06981	3639.5	4128.2	7.5822	0.06097	3636.0	4123.8	7.5173
900	0.08958	3837.8	4375.3	7.8727	0.07669	3835.0	4371.8	7.7991	0.06702	3832.1	4368.3	7.7351
1000	0.09749	4037.8	4622.7	8.0751	0.08350	4035.3	4619.8	8.0020	0.07301	4032.8	4616.9	7.9384
1100	0.10536	4243.3	4876.4	8.2661	0.09027	4240.9	4872.8	8.1933	0.07896	4238.6	4870.3	8.1300
1200	0.11321	4454.0	5133.3	8.4474	0.09703	4451.7	5130.9	8.3747	0.08488	4449.5	5128.5	8.3115
1300	0.12106	4669.6	5396.0	8.6199	0.10377	4667.3	5393.7	8.5476	0.09080	4665.0	5391.5	8.4842
P = 9.0 MPa (303.40°C)					P = 10.0 MPa (311.06°C)					P = 12.5 MPa (327.49°C)		
Sat.	0.02048	2557.8	2742.1	5.6772	0.018026	2544.4	2724.7	5.6141	0.013495	2505.1	2673.8	5.4624
325	0.02327	2646.6	2856.0	5.8712	0.019861	2610.4	2809.1	5.7568	0.016128	2624.8	2826.2	5.7118
350	0.02580	2724.4	2956.6	6.0361	0.02242	2699.2	2923.4	5.9443	0.02000	2789.3	3039.3	6.0417
400	0.02993	2848.4	3117.8	6.2854	0.02641	2832.4	3096.5	6.2120	0.02299	2912.5	3199.8	6.2719
450	0.03350	2955.2	3256.6	6.4844	0.02975	2943.4	3240.9	6.4190	0.02560	3021.7	3341.8	6.4618
500	0.03677	3055.2	3396.1	6.6576	0.03279	3045.8	3373.7	6.5966	0.02801	3125.0	3475.2	6.6290
550	0.03987	3152.2	3511.0	6.8142	0.03564	3144.6	3500.9	6.7561	0.03029	3225.4	3604.0	6.7810
600	0.04285	3248.1	3633.7	6.9589	0.03837	3241.7	3625.3	6.9029	0.03248	3324.4	3730.4	6.9218
650	0.04574	3343.6	3755.3	7.0943	0.04101	3338.2	3748.2	7.0398	0.03460	3422.9	3855.3	7.0536
700	0.04857	3439.3	3876.5	7.2221	0.04358	3434.7	3870.5	7.1687	0.03869	3520.0	4103.8	7.2965
800	0.05409	3632.5	4119.3	7.4596	0.04959	3628.9	4114.8	7.4077	0.04267	3819.1	4352.5	7.5182
900	0.05950	3829.2	4364.8	7.6783	0.05349	3826.3	4361.2	7.6272	0.04658	4021.8	4603.8	7.7237
1000	0.06485	4030.3	4614.0	7.8821	0.05832	4027.8	4611.0	7.8315	0.05045	4226.2	4858.8	7.9165
1100	0.07016	4236.3	4867.7	8.0740	0.06312	4234.0	4865.1	8.0237	0.05430	4439.3	5118.0	8.0937
1200	0.07544	4447.2	5126.2	8.2556	0.06789	4444.9	5123.8	8.2055	0.05813	4654.8	5381.4	8.2717
1300	0.08072	4662.7	5389.2	8.4284	0.07265	4660.5	5387.0	8.3783				

TABLE A-6

Superheated water (Concluded)

T °C	v m³/kg	u kJ/kg	h kJ/kg	s kJ/(kg·K)	v m³/kg	u kJ/kg	h kJ/kg	s kJ/(kg·K)	v m³/kg	u kJ/kg	h kJ/kg	s kJ/(kg·K)
P = 15.0 MPa (342.24°C)				P = 17.5 MPa (354.75°C)				P = 20.0 MPa (365.81°C)				
Sat.	0.010337	2455.5	2610.5	5.3098	0.007920	2390.2	2528.8	5.1419	0.005834	2293.0	2409.7	4.9269
350	0.011470	2520.4	2692.4	5.4421	0.012447	2685.0	2902.9	5.7213	0.009942	2619.3	2818.1	5.5540
400	0.015649	2740.7	2975.5	5.8811	0.015174	2844.2	3109.7	6.0184	0.012695	2808.2	3060.1	5.9017
450	0.018445	2879.5	3156.2	6.1404	0.017358	2970.3	3274.1	6.2383	0.014768	2942.9	3238.2	6.1401
500	0.02080	2996.6	3308.6	6.3443	0.019288	3083.9	3421.4	6.4230	0.016555	3062.4	3393.5	6.3348
550	0.02293	3104.7	3448.6	6.5199	0.02106	3191.5	3560.1	6.5866	0.018178	3174.0	3537.6	6.5048
600	0.02491	3208.6	3582.3	6.6776	0.02274	3296.0	3693.9	6.7357	0.019693	3281.4	3675.3	6.6582
650	0.02680	3310.3	3712.3	6.8224	0.02434	3398.7	3824.6	6.8736	0.02113	3386.4	3809.0	6.7993
700	0.02861	3410.9	3840.1	6.9572	0.02598	3501.8	3951.1	7.0044	0.02245	3492.7	3946.7	6.9344
800	0.03210	3610.9	4092.4	7.2040	0.02738	3604.7	4081.1	7.1244	0.02385	3592.7	4089.7	7.0544
900	0.03546	3811.9	4343.8	7.4279	0.03031	3804.7	4335.1	7.3507	0.02645	3797.5	4326.4	7.2830
1000	0.03875	4015.4	4596.6	7.6348	0.03316	4009.3	4589.5	7.5589	0.02897	4003.1	4582.5	7.4925
1100	0.04200	4222.8	4852.6	7.8283	0.03597	4216.9	4846.4	7.7531	0.03145	4211.3	4840.2	7.6874
1200	0.04523	4433.8	5112.3	8.0108	0.03876	4428.3	5106.8	7.9360	0.03391	4422.8	5101.0	7.8707
1300	0.04845	4649.1	5376.0	8.1840	0.04154	4643.6	5370.5	8.1093	0.03638	4638.0	5365.1	8.0442
P = 25.0 MPa				P = 30.0 MPa				P = 35.0 MPa				
375	0.0019731	1798.7	1848.0	4.0320	0.0017892	1737.8	1791.6	3.9305	0.0017003	1702.9	1762.4	3.8722
400	0.006004	2430.1	2580.2	5.1418	0.002790	2067.4	2151.1	4.4728	0.002100	1914.1	1987.6	4.2126
425	0.007881	2609.2	2806.3	5.4723	0.005303	2455.1	2614.2	5.1604	0.003428	2253.4	2373.4	4.7747
450	0.009162	2720.7	2949.7	5.6744	0.006735	2619.3	2821.4	5.4424	0.004961	2498.7	2672.4	5.1962
500	0.011123	2884.3	3162.4	5.9592	0.008678	2820.7	3081.1	5.7905	0.006927	2751.9	2994.4	5.6282
550	0.012724	3017.5	3335.6	6.1765	0.010168	2970.3	3275.4	6.0342	0.008345	2921.0	3213.0	5.9028
600	0.014137	3137.9	3491.4	6.3602	0.011448	3100.5	3443.9	6.2331	0.009527	3082.0	3395.5	6.1179
650	0.015433	3251.8	3637.4	6.5229	0.012596	3221.0	3598.9	6.4058	0.010576	3189.8	3559.9	6.3010
700	0.016646	3361.3	3777.5	6.6707	0.013661	3335.8	3745.8	6.5606	0.011533	3309.8	3713.6	6.4631
800	0.018912	3574.3	4047.1	6.9345	0.015623	3555.5	4024.2	6.8332	0.014883	3754.0	4274.9	6.8386
900	0.021045	3783.0	4309.1	7.1680	0.017448	3768.5	4291.9	7.0718	0.016410	3966.7	4541.1	7.2084
1000	0.02310	3990.9	4568.5	7.3802	0.019196	3978.8	4554.7	7.2867	0.017895	4178.3	4804.6	7.4037
1100	0.02512	4200.2	4828.2	7.5765	0.020903	4189.2	4818.3	7.4845	0.019360	4390.7	5068.3	7.5910
1200	0.02711	4412.0	5089.9	7.7605	0.022589	4401.3	5079.0	7.6692	0.020815	4605.1	5333.6	7.7653
1300	0.02910	4626.9	5354.4	7.9342	0.024266	4616.0	5344.0	7.8432				
P = 40.0 MPa				P = 50.0 MPa				P = 60.0 MPa				
375	0.0016407	1677.1	1742.8	3.8290	0.0015594	1638.6	1718.6	3.7639	0.0015028	1603.4	1699.5	3.7141
400	0.0019077	1854.6	1930.9	4.1135	0.0017309	1788.1	1874.6	4.0031	0.0016335	1745.4	1843.4	3.9318
425	0.002532	2096.9	2198.1	4.5029	0.002007	1959.7	2060.0	4.2734	0.0018185	1892.7	2001.7	4.1626
450	0.003693	2365.1	2512.8	4.9459	0.002486	2159.8	2284.0	4.5884	0.002085	2053.9	2179.0	4.4121
500	0.005622	2678.4	2903.3	5.4700	0.003892	2525.5	2720.1	5.1726	0.002956	2390.8	2587.9	4.9321
550	0.006984	2869.7	3149.1	5.7785	0.005118	2763.6	3019.5	5.5485	0.003958	2658.8	2896.2	5.3441
600	0.008094	3022.6	3348.4	6.0144	0.006112	2942.0	3247.6	5.8178	0.004834	2861.1	3151.2	5.6452
650	0.009063	3158.0	3520.6	6.2054	0.006966	3093.5	3441.8	6.0342	0.005595	3028.8	3364.5	5.8829
700	0.009941	3283.6	3681.2	6.3750	0.007727	3230.5	3618.8	6.2189	0.006272	3177.2	3553.5	6.0824
800	0.011523	3517.8	3978.7	6.6682	0.009076	3479.8	3933.8	6.5290	0.007459	3441.5	3889.1	6.4109
900	0.012962	3739.4	4257.9	6.9150	0.010283	3710.3	4224.4	6.7882	0.008508	3681.0	4191.5	6.6805
1000	0.014324	3954.6	4527.6	7.1356	0.011411	3930.5	4501.1	7.0146	0.009480	3908.4	4475.2	6.9127
1100	0.015642	4167.4	4793.1	7.3364	0.012496	4145.7	4770.5	7.2184	0.010409	4124.1	4748.6	7.1195
1200	0.016940	4380.1	5057.7	7.5224	0.013561	4359.1	5037.2	7.4058	0.011317	4338.2	5017.2	7.3083
1300	0.018229	4594.3	5323.5	7.6969	0.014616	4572.8	5303.6	7.5808	0.012215	4551.4	5284.3	7.4837

TABLE A-7

Compressed liquid water

T °C	v m ³ /kg	u kJ/kg	h kJ/kg	s kJ/(kg·K)	v m ³ /kg	u kJ/kg	h kJ/kg	s kJ/(kg·K)	v m ³ /kg	u kJ/kg	h kJ/kg	s kJ/(kg·K)				
													P = 5 MPa (263.99°C)			P = 10 MPa (311.06°C)
Sat.	0.0012859	1147.8	1154.2	2.9202	0.0014524	1393.0	1407.6	3.3596	0.0016581	1585.6	1610.5	3.6848				
0	0.0009977	0.04	5.04	0.0001	0.0009952	0.09	10.04	0.0002	0.0009928	0.15	15.05	0.0004				
20	0.0009995	83.65	88.65	0.2956	0.0009972	83.36	93.33	0.2945	0.0009950	83.06	97.99	0.2934				
40	0.0010056	166.95	171.97	0.5705	0.0010034	166.35	176.38	0.5686	0.0010013	165.76	180.78	0.5666				
60	0.0010149	250.23	255.30	0.8285	0.0010127	249.36	259.49	0.8258	0.0010105	248.51	263.67	0.8232				
80	0.0010268	333.72	338.85	1.0720	0.0010245	332.59	342.83	1.0688	0.0010222	331.48	346.81	1.0656				
100	0.0010410	417.52	422.72	1.3030	0.0010385	416.12	426.50	1.2992	0.0010361	414.74	430.28	1.2955				
120	0.0010576	501.80	507.09	1.5233	0.0010549	500.08	510.64	1.5189	0.0010522	498.40	514.19	1.5145				
140	0.0010768	586.76	592.15	1.7343	0.0010737	584.68	595.42	1.7292	0.0010707	582.66	598.72	1.7242				
160	0.0010988	672.62	678.12	1.9375	0.0010953	670.13	681.08	1.9317	0.0010918	667.71	684.09	1.9260				
180	0.0011240	759.63	765.25	2.1341	0.0011199	756.65	767.84	2.1275	0.0011159	753.76	770.50	2.1210				
200	0.0011530	848.1	853.9	2.3255	0.0011480	844.5	856.0	2.3178	0.0011433	841.0	858.2	2.3104				
220	0.0011866	938.4	944.4	2.5128	0.0011805	934.1	945.9	2.5039	0.0011748	929.9	947.5	2.4953				
240	0.0012264	1031.4	1037.5	2.6979	0.0012187	1026.0	1038.1	2.6872	0.0012114	1020.8	1039.0	2.6771				
260	0.0012749	1127.9	1134.3	2.8830	0.0012645	1121.1	1133.7	2.8699	0.0012550	1114.6	1133.4	2.8576				
280					0.0013216	1220.9	1234.1	3.0548	0.0013084	1212.5	1232.1	3.0393				
300					0.0013972	1328.4	1342.3	3.2469	0.0013770	1316.6	1337.3	3.2260				
320									0.0014724	1431.1	1453.2	3.4247				
340									0.0016311	1567.5	1591.9	3.6546				
					P = 20 MPa (368.81°C)				P = 30 MPa				P = 50 MPa			
Sat.	0.002036	1785.6	1826.3	4.0139	0.0009858	0.25	29.82	0.0001	0.0009766	0.20	49.03	0.0014				
0	0.0009904	0.19	20.01	0.0004	0.0009886	82.17	111.84	0.2899	0.0009804	81.00	130.02	0.2848				
20	0.0009928	82.77	102.62	0.2923	0.0009951	164.04	193.89	0.5607	0.0009872	161.86	211.21	0.5527				
40	0.0009992	165.17	185.16	0.5646	0.0010042	245.06	276.19	0.8154	0.0009962	242.98	292.79	0.8052				
60	0.0010084	247.68	267.85	0.8206	0.0010156	328.30	358.77	1.0561	0.0010073	324.34	374.70	1.0440				
80	0.0010199	330.40	350.80	1.0624	0.0010290	410.78	441.66	1.2844	0.0010201	405.88	456.89	1.2703				
100	0.0010337	413.39	434.06	1.2917	0.0010445	493.59	524.93	1.5018	0.0010348	487.65	539.39	1.4857				
120	0.0010496	496.76	517.76	1.5102	0.0010621	576.88	608.75	1.7098	0.0010515	569.77	622.35	1.6915				
140	0.0010678	580.69	602.04	1.7193	0.0010821	660.82	693.28	1.9096	0.0010703	652.41	705.92	1.8891				
160	0.0010885	665.35	687.12	1.9204	0.0011047	745.59	778.73	2.1024	0.0010912	735.69	790.25	2.0794				
180	0.0011120	750.95	773.20	2.1147	0.0011302	831.4	865.3	2.2893	0.0011146	819.7	875.5	2.2634				
200	0.0011388	837.7	860.5	2.3031	0.0011590	918.3	953.1	2.4711	0.0011408	904.7	961.7	2.4419				
220	0.0011695	925.9	949.3	2.4870	0.0011920	1006.9	1042.6	2.6490	0.0011702	990.7	1049.2	2.6158				
240	0.0012046	1016.0	1040.0	2.6674	0.0012303	1097.4	1134.3	2.8243	0.0012034	1078.1	1138.2	2.7860				
260	0.0012462	1108.6	1133.5	2.8459	0.0012755	1190.7	1229.0	2.9986	0.0012415	1167.2	1229.3	2.9537				
280	0.0012965	1204.7	1230.6	3.0248	0.0013304	1287.9	1327.8	3.1741	0.0012860	1258.7	1323.0	3.1200				
300	0.0013596	1306.1	1333.3	3.2071	0.0013997	1390.7	1432.7	3.3539	0.0013388	1353.3	1420.2	3.2868				
320	0.0014437	1415.7	1444.6	3.3979	0.0014920	1501.7	1546.5	3.5426	0.0014032	1452.0	1522.1	3.4557				
340	0.0015684	1639.7	1671.0	3.6075	0.0016265	1626.6	1675.4	3.7494	0.0014838	1556.0	1630.2	3.6291				
360	0.0018226	1702.8	1739.3	3.8772	0.0018691	1781.4	1837.5	4.0012	0.0015884	1667.2	1746.6	3.8101				
380																

TABLE A-11

Saturated refrigerant-134a—Temperature table

Temp., T°C	Press., P _{sat} MPa	Specific volume, m ³ /kg		Internal energy, kJ/kg		Enthalpy, kJ/kg			Entropy, kJ/(kg·K)	
		Sat. liquid, v _f	Sat. vapor, v _g	Sat. liquid, u _f	Sat. vapor, u _g	Sat. liquid, h _f	Evap., h _{fg}	Sat. vapor, h _g	Sat. liquid, s _f	Sat. vapor, s _g
-40	0.05164	0.0007055	0.3569	-0.04	204.45	0.00	222.88	222.88	0.0000	0.9560
-36	0.06332	0.0007113	0.2947	4.68	206.73	4.73	220.67	225.40	0.0201	0.9506
-32	0.07704	0.0007172	0.2451	9.47	209.01	9.52	218.37	227.90	0.0401	0.9456
-28	0.09305	0.0007233	0.2052	14.31	211.29	14.37	216.01	230.38	0.0600	0.9411
-26	0.10199	0.0007265	0.1882	16.75	212.43	16.82	214.80	231.62	0.0699	0.9390
-24	0.11160	0.0007296	0.1728	19.21	213.57	19.29	213.57	232.85	0.0798	0.9370
-22	0.12192	0.0007328	0.1590	21.68	214.70	21.77	212.32	234.08	0.0897	0.9351
-20	0.13299	0.0007361	0.1464	24.17	215.84	24.26	211.05	235.31	0.0996	0.9332
-18	0.14483	0.0007395	0.1350	26.67	216.97	26.77	209.76	236.53	0.1094	0.9315
-16	0.15748	0.0007428	0.1247	29.18	218.10	29.30	208.45	237.74	0.1192	0.9298
-12	0.18540	0.0007498	0.1068	34.25	220.36	34.39	205.77	240.15	0.1388	0.9267
-8	0.21704	0.0007569	0.0919	39.38	222.60	39.54	203.00	242.54	0.1583	0.9239
-4	0.25274	0.0007644	0.0794	44.56	224.84	44.75	200.15	244.90	0.1777	0.9213
0	0.29282	0.0007721	0.0689	49.79	227.06	50.02	197.21	247.23	0.1970	0.9190
4	0.33765	0.0007801	0.0600	55.08	229.27	55.35	194.19	249.53	0.2162	0.9169
8	0.38756	0.0007884	0.0525	60.43	231.46	60.73	191.07	251.80	0.2354	0.9150
12	0.44294	0.0007971	0.0460	65.83	233.63	66.18	187.85	254.03	0.2545	0.9132
16	0.50416	0.0008062	0.0405	71.29	235.78	71.69	184.52	256.22	0.2735	0.9116
20	0.57160	0.0008157	0.0358	76.80	237.91	77.26	181.09	258.35	0.2924	0.9102
24	0.64566	0.0008257	0.0317	82.37	240.01	82.90	177.55	260.45	0.3113	0.9089
26	0.68530	0.0008309	0.0298	85.18	241.05	85.75	175.73	261.48	0.3208	0.9082
28	0.72675	0.0008362	0.0281	88.00	242.08	88.61	173.89	262.50	0.3302	0.9076
30	0.77006	0.0008417	0.0265	90.84	243.10	91.49	172.00	263.50	0.3396	0.9070
32	0.81528	0.0008473	0.0250	93.70	244.12	94.39	170.09	264.48	0.3490	0.9064
34	0.86247	0.0008530	0.0236	96.58	245.12	97.31	168.14	265.45	0.3584	0.9058
36	0.91168	0.0008590	0.0223	99.47	246.11	100.25	166.15	266.40	0.3678	0.9053
38	0.96298	0.0008651	0.0210	102.38	247.09	103.21	164.12	267.33	0.3772	0.9047
40	1.0164	0.0008714	0.0199	105.30	248.06	106.19	162.05	268.24	0.3866	0.9041
42	1.0720	0.0008780	0.0188	108.25	249.02	109.19	159.94	269.14	0.3960	0.9035
44	1.1299	0.0008847	0.0177	111.22	249.96	112.22	157.79	270.01	0.4054	0.9030
48	1.2526	0.0008989	0.0159	117.22	251.79	118.35	153.33	271.68	0.4243	0.9017
52	1.3851	0.0009142	0.0142	123.31	253.55	124.58	148.66	273.24	0.4432	0.9004
56	1.5278	0.0009308	0.0127	129.51	255.23	130.93	143.75	274.68	0.4622	0.8990
60	1.6813	0.0009488	0.0114	135.82	256.81	137.42	138.57	275.99	0.4814	0.8973
70	2.1162	0.0010027	0.0086	152.22	260.15	154.34	124.08	278.43	0.5302	0.8918
80	2.6324	0.0010766	0.0064	169.88	262.14	172.71	106.41	279.12	0.5814	0.8827
90	3.2435	0.0011949	0.0046	189.82	261.34	193.69	82.63	276.32	0.6380	0.8655
100	3.9742	0.0015443	0.0027	218.60	248.49	224.74	34.40	259.13	0.7196	0.8117

Source for Tables A-8 through A-10: M. J. Moran and H. N. Shapiro, *Fundamentals of Engineering Thermodynamics*, 2nd ed. (New York: John Wiley & Sons, 1992), pp. 710–15. Originally based on equations from D. P. Wilson and R. S. Basu, "Thermodynamic Properties of a New Stratospherically Safe Working Fluid—Refrigerant-134a," *ASHRAE Trans.* 94, Pt. 2 (1988), pp. 2095–118. Used with permission.

TABLE A-12

Saturated refrigerant-134a—Pressure table

Press., PMPa	Temp., T_{sat} , °C	Specific volume, m^3/kg		Internal energy, kJ/kg		Enthalpy, kJ/kg			Entropy, kJ/(kg·K)	
		Sat. liquid, v_f	Sat. vapor, v_g	Sat. liquid, u_f	Sat. vapor, u_g	Sat. liquid, h_f	Evap., h_{fg}	Sat. vapor, h_g	Sat. liquid, s_f	Sat. vapor, s_g
0.06	-37.07	0.0007097	0.3100	3.41	206.12	3.46	221.27	224.72	0.0147	0.9520
0.08	-31.21	0.0007184	0.2366	10.41	209.46	10.47	217.92	228.39	0.0440	0.9447
0.10	-26.43	0.0007258	0.1917	16.22	212.18	16.29	215.06	231.35	0.0678	0.9395
0.12	-22.36	0.0007323	0.1614	21.23	214.50	21.32	212.54	233.86	0.0879	0.9354
0.14	-18.80	0.0007381	0.1395	25.66	216.52	25.77	210.27	236.04	0.1055	0.9322
0.16	-15.62	0.0007435	0.1229	29.66	218.32	29.78	208.18	237.97	0.1211	0.9295
0.18	-12.73	0.0007485	0.1098	33.31	219.94	33.45	206.26	239.71	0.1352	0.9273
0.20	-10.09	0.0007532	0.0993	36.69	221.43	36.84	204.46	241.30	0.1481	0.9253
0.24	-5.37	0.0007618	0.0834	42.77	224.07	42.95	201.14	244.09	0.1710	0.9222
0.28	-1.23	0.0007697	0.0719	48.18	226.38	48.39	198.13	246.52	0.1911	0.9197
0.32	2.48	0.0007770	0.0632	53.06	228.43	53.31	195.35	248.66	0.2089	0.9177
0.36	5.84	0.0007839	0.0564	57.54	230.28	57.82	192.76	250.58	0.2251	0.9160
0.4	8.93	0.0007904	0.0509	61.69	231.97	62.00	190.32	252.32	0.2399	0.9145
0.5	15.74	0.0008056	0.0409	70.93	235.64	71.33	184.74	256.07	0.2723	0.9117
0.6	21.58	0.0008196	0.0341	78.99	238.74	79.48	179.71	259.19	0.2999	0.9097
0.7	26.72	0.0008328	0.0292	86.19	241.42	86.78	175.07	261.85	0.3242	0.9080
0.8	31.33	0.0008454	0.0255	92.75	243.78	93.42	170.73	264.15	0.3459	0.9066
0.9	35.53	0.0008576	0.0226	98.79	245.88	99.56	166.62	266.18	0.3656	0.9054
1.0	39.39	0.0008695	0.0202	104.42	247.77	105.29	162.68	267.97	0.3838	0.9043
1.2	46.32	0.0008928	0.0166	114.69	251.03	115.76	155.23	270.99	0.4164	0.9023
1.4	52.43	0.0009159	0.0140	123.98	253.74	125.26	148.14	273.40	0.4453	0.9003
1.6	57.92	0.0009392	0.0121	132.52	256.00	134.02	141.31	275.33	0.4714	0.8982
1.8	62.91	0.0009631	0.0105	140.49	257.88	142.22	134.60	276.83	0.4954	0.8959
2.0	67.49	0.0009878	0.0093	148.02	259.41	149.99	127.95	277.94	0.5178	0.8934
2.5	77.59	0.0010562	0.0069	165.48	261.84	168.12	111.06	279.17	0.5687	0.8854
3.0	86.22	0.0011416	0.0053	181.88	262.16	185.30	92.71	278.01	0.6156	0.8735

TABLE A-13

Superheated refrigerant-134a

T °C	v m ³ /kg	u kJ/kg	h kJ/kg	s kJ/(kg·K)	v m ³ /kg	u kJ/kg	h kJ/kg	s kJ/(kg·K)	v m ³ /kg	u kJ/kg	h kJ/kg	s kJ/(kg·K)
P = 0.06 MPa (T_{sat} = -37.07°C)				P = 0.10 MPa (T_{sat} = -26.43°C)				P = 0.14 MPa (T_{sat} = -18.80°C)				
Sat.	0.31003	206.12	224.72	0.9520	0.19170	212.18	231.35	0.9395	0.13945	216.52	236.04	0.9322
-20	0.33536	217.86	237.98	1.0062	0.19770	216.77	236.54	0.9602	0.14549	223.03	243.40	0.9606
-10	0.34992	224.97	245.96	1.0371	0.20686	224.01	244.70	0.9918	0.15219	230.55	251.86	0.9922
0	0.36433	232.24	254.10	1.0675	0.21587	231.41	252.99	1.0227	0.15875	238.21	260.43	1.0230
10	0.37861	239.69	262.41	1.0973	0.22473	238.96	261.43	1.0531	0.16520	246.01	269.13	1.0532
20	0.39279	247.32	270.89	1.1267	0.23349	246.67	270.02	1.0829	0.17155	253.96	277.97	1.0828
30	0.40688	255.12	279.53	1.1557	0.24216	254.54	278.76	1.1122	0.17783	262.06	286.96	1.1120
40	0.42091	263.10	288.35	1.1844	0.25076	262.58	287.66	1.1411	0.18404	270.32	296.09	1.1407
50	0.43487	271.25	297.34	1.2126	0.25930	270.79	296.72	1.1696	0.19020	278.74	305.37	1.1690
60	0.44879	279.58	306.51	1.2405	0.26779	279.16	305.94	1.1977	0.19633	287.32	314.80	1.1969
70	0.46266	288.08	315.84	1.2681	0.27623	287.70	315.32	1.2254	0.20241	296.06	324.39	1.2244
80	0.47650	296.75	325.34	1.2954	0.28464	296.40	324.87	1.2528	0.20846	304.95	334.14	1.2516
90	0.49031	305.58	335.00	1.3224	0.29302	305.27	334.57	1.2799	0.21449	314.01	344.04	1.2785
100												
P = 0.18 MPa (T_{sat} = -12.73°C)				P = 0.20 MPa (T_{sat} = -10.09°C)				P = 0.24 MPa (T_{sat} = -5.37°C)				
Sat.	0.10983	219.94	239.71	0.9273	0.09933	221.43	241.30	0.9253	0.08343	224.07	244.09	0.9222
-10	0.11135	222.02	242.06	0.9362	0.09938	221.50	241.38	0.9256	0.08574	228.31	248.89	0.9399
0	0.11678	229.67	250.69	0.9684	0.10438	229.23	250.10	0.9582	0.08993	236.26	257.84	0.9721
10	0.12207	237.44	259.41	0.9998	0.10922	237.05	258.89	0.9898	0.09339	244.30	266.85	1.0034
20	0.12723	245.33	268.23	1.0304	0.11394	244.99	267.78	1.0206	0.09794	252.45	275.95	1.0339
30	0.13230	253.36	277.17	1.0604	0.11856	253.06	276.77	1.0508	0.10181	260.72	285.16	1.0637
40	0.13730	261.53	286.24	1.0898	0.12311	261.26	285.88	1.0804	0.10562	269.12	294.47	1.0930
50	0.14222	269.85	295.45	1.1187	0.12758	269.61	295.12	1.1094	0.10937	277.67	303.91	1.1218
60	0.14710	278.31	304.79	1.1472	0.13201	278.10	304.50	1.1380	0.11307	286.35	313.49	1.1501
70	0.15193	286.93	314.28	1.1753	0.13639	286.74	314.02	1.1661	0.11674	295.18	323.19	1.1780
80	0.15672	295.71	323.82	1.2030	0.14073	295.53	323.68	1.1939	0.12037	304.15	333.04	1.2055
90	0.16148	304.63	333.70	1.2303	0.14504	304.47	333.48	1.2212	0.12398	313.27	343.03	1.2326
100	0.16622	313.72	343.63	1.2573	0.14932	313.57	343.43	1.2483				
P = 0.28 MPa (T_{sat} = -1.23°C)				P = 0.32 MPa (T_{sat} = 2.40°C)				P = 0.40 MPa (T_{sat} = 8.93°C)				
Sat.	0.07193	226.38	246.52	0.9197	0.06322	228.43	248.66	0.9177	0.05089	231.97	252.32	0.9145
0	0.07240	227.37	247.64	0.9238	0.06576	234.61	255.65	0.9427	0.05119	232.87	253.35	0.9182
10	0.07613	235.44	256.76	0.9566	0.06901	242.87	264.95	0.9749	0.05397	241.37	262.96	0.9515
20	0.07972	243.59	265.91	0.9883	0.07214	251.19	274.28	1.0062	0.05662	249.89	272.54	0.9837
30	0.08320	251.83	275.12	1.0192	0.07518	259.61	283.67	1.0367	0.05917	258.47	282.14	1.0148
40	0.08660	260.17	284.42	1.0494	0.07815	268.14	293.15	1.0665	0.06164	267.13	291.79	1.0452
50	0.08992	268.64	293.81	1.0789	0.08106	276.79	302.72	1.0957	0.06405	275.89	301.51	1.0748
60	0.09319	277.23	303.32	1.1079	0.08392	285.56	312.41	1.1243	0.06641	284.75	311.32	1.1038
70	0.09641	285.96	312.95	1.1364	0.08674	294.46	322.22	1.1525	0.06873	293.73	321.23	1.1322
80	0.09960	294.82	322.71	1.1644	0.08953	303.50	332.15	1.1802	0.07102	302.84	331.25	1.1602
90	0.10275	303.83	332.60	1.1920	0.09229	312.68	342.21	1.2076	0.07327	312.07	341.38	1.1878
100	0.10587	312.88	342.62	1.2193	0.09503	322.00	352.40	1.2345	0.07550	321.44	351.64	1.2149
110	0.10897	322.27	352.78	1.2461	0.09774	331.45	362.73	1.2611	0.07771	330.94	362.03	1.2417
120	0.11205	331.71	363.08	1.2727					0.07991	340.58	372.54	1.2681
130									0.08208	350.35	383.18	1.2941
140												

TABLE A-13

Superheated refrigerant-134a (Concluded)

T °C	P = 0.50 MPa (T _{sat} = 15.74°C)				P = 0.60 MPa (T _{sat} = 21.50°C)				P = 0.70 MPa (T _{sat} = 26.72°C)			
	v m ³ /kg	u kJ/kg	h kJ/kg	s kJ/(kg·K)	v m ³ /kg	u kJ/kg	h kJ/kg	s kJ/(kg·K)	v m ³ /kg	u kJ/kg	h kJ/kg	s kJ/(kg·K)
Sat.	0.04086	253.64	256.07	0.9117	0.03408	238.74	259.19	0.9097	0.02918	241.42	261.85	0.9080
20	0.04188	239.40	260.34	0.9264	0.03581	246.41	267.89	0.9388	0.02979	244.51	265.37	0.9197
30	0.04416	248.20	270.28	0.9597	0.03774	255.45	278.09	0.9719	0.03157	253.83	275.93	0.9539
40	0.04633	256.99	280.16	0.9918	0.03958	264.48	288.23	1.0037	0.03324	263.08	286.35	0.9867
50	0.04842	265.83	290.04	1.0229	0.04134	273.54	298.35	1.0346	0.03482	272.31	296.69	1.0182
60	0.05043	274.73	299.95	1.0531	0.04304	282.66	308.48	1.0645	0.03634	281.57	307.01	1.0487
70	0.05240	283.72	309.92	1.0825	0.04469	291.86	318.67	1.0938	0.03781	290.88	317.35	1.0784
80	0.05432	292.80	319.96	1.1114	0.04631	301.14	328.93	1.1225	0.03924	300.27	327.74	1.1074
90	0.05620	302.00	330.10	1.1397	0.04790	310.53	339.27	1.1505	0.04084	309.74	338.19	1.1358
100	0.05805	311.31	340.33	1.1675	0.04948	320.03	349.70	1.1781	0.04201	319.31	348.71	1.1637
110	0.05988	320.74	350.68	1.1949	0.05099	329.64	360.24	1.2053	0.04335	328.98	359.33	1.1910
120	0.06168	330.30	361.14	1.2218	0.05251	339.38	370.88	1.2320	0.04468	338.76	370.04	1.2179
130	0.06347	339.98	371.72	1.2484	0.05402	349.23	381.64	1.2584	0.04599	348.66	380.86	1.2444
140	0.06524	349.79	382.42	1.2746	0.05550	359.21	392.52	1.2844	0.04729	358.68	391.79	1.2706
150					0.05698	369.32	403.51	1.3100	0.04857	368.82	402.82	1.2963
160												
	P = 0.80 MPa (T _{sat} = 31.33°C)				P = 0.90 MPa (T _{sat} = 35.83°C)				P = 1.00 MPa (T _{sat} = 39.39°C)			
Sat.	0.02547	243.78	264.15	0.9066	0.02255	245.88	266.18	0.9054	0.02020	247.77	267.97	0.9043
40	0.02691	252.18	273.66	0.9374	0.02325	250.32	271.25	0.9217	0.02029	248.39	268.68	0.9066
50	0.02846	261.62	284.39	0.9711	0.02472	260.09	282.34	0.9566	0.02171	258.48	280.19	0.9428
60	0.02992	271.04	294.98	1.0034	0.02609	269.72	293.21	0.9897	0.02301	268.35	291.36	0.9768
70	0.03131	280.45	305.50	1.0345	0.02738	279.30	303.94	1.0214	0.02423	278.11	302.44	1.0093
80	0.03264	289.89	316.00	1.0647	0.02861	288.87	314.62	1.0521	0.02538	287.82	313.20	1.0405
90	0.03393	299.37	326.52	1.0940	0.02980	298.46	325.28	1.0819	0.02649	297.53	324.01	1.0707
100	0.03518	308.93	337.08	1.1227	0.03095	308.11	335.96	1.1109	0.02755	307.27	334.82	1.1000
110	0.03642	318.57	347.71	1.1508	0.03207	317.82	346.68	1.1392	0.02858	317.06	345.65	1.1286
120	0.03762	328.31	358.40	1.1784	0.03316	327.62	357.47	1.1670	0.02959	326.93	356.52	1.1567
130	0.03881	338.14	369.19	1.2055	0.03423	337.52	368.33	1.1943	0.03058	336.88	367.46	1.1841
140	0.03997	348.09	380.07	1.2321	0.03529	347.51	379.27	1.2211	0.03154	346.92	378.46	1.2111
150	0.04113	358.15	391.05	1.2584	0.03633	357.61	390.31	1.2475	0.03250	357.06	389.56	1.2376
160	0.04227	368.32	402.14	1.2843	0.03736	367.82	401.44	1.2735	0.03344	367.31	400.74	1.2638
170	0.04340	378.61	413.33	1.3098	0.03838	378.14	412.68	1.2992	0.03436	377.66	412.02	1.2895
180	0.04452	389.02	424.63	1.3351	0.03939	388.57	424.02	1.3245	0.03528	388.12	423.40	1.3149
	P = 1.20 MPa (T _{sat} = 46.32°C)				P = 1.40 MPa (T _{sat} = 52.43°C)				P = 1.60 MPa (T _{sat} = 57.92°C)			
Sat.	0.01663	251.03	270.99	0.9023	0.01405	253.74	273.40	0.9003	0.01208	258.00	275.33	0.8982
50	0.01712	254.98	275.52	0.9164	0.01495	262.17	283.10	0.9297	0.01233	258.48	278.20	0.9069
60	0.01835	265.42	287.44	0.9527	0.01603	272.87	295.31	0.9658	0.01340	269.89	291.33	0.9457
70	0.01947	275.59	298.96	0.9888	0.01701	283.29	307.10	0.9997	0.01435	280.78	303.74	0.9813
80	0.02051	285.62	310.24	1.0192	0.01792	293.55	318.63	1.0319	0.01521	291.39	315.72	1.0148
90	0.02150	295.59	321.39	1.0503	0.01878	303.73	330.02	1.0628	0.01601	301.84	327.46	1.0467
100	0.02244	305.54	332.47	1.0804	0.01950	313.88	341.32	1.0927	0.01677	312.20	339.04	1.0773
110	0.02335	315.50	343.52	1.1096	0.02039	324.05	352.59	1.1218	0.01750	322.63	350.53	1.1069
120	0.02423	325.51	354.58	1.1381	0.02115	334.25	363.86	1.1501	0.01820	332.87	361.99	1.1357
130	0.02508	335.58	365.68	1.1660	0.02189	344.50	375.15	1.1777	0.01887	343.24	373.44	1.1638
140	0.02592	345.73	376.83	1.1933	0.02262	354.82	386.49	1.2048	0.01953	353.66	384.91	1.1912
150	0.02674	355.95	388.04	1.2201	0.02333	365.22	397.89	1.2315	0.02017	364.15	396.43	1.2181
160	0.02754	366.27	399.33	1.2465	0.02403	375.71	409.36	1.2576	0.02080	374.71	407.99	1.2445
170	0.02834	376.69	410.70	1.2724	0.02472	386.29	420.90	1.2834	0.02142	385.35	419.62	1.2704
180	0.02912	387.21	422.16	1.2980	0.02541	396.98	432.53	1.3088	0.02203	396.08	431.33	1.2960
190					0.02608	407.73	444.24	1.3338	0.02263	406.90	443.11	1.3212
200												



TABLE A-14 Ideal Gas Specific Heats of Some Common Gases (kJ/kg · K)

Temp. K	c_p	c_v	k	c_p	c_v	k	c_p	c_v	k	Temp. K
	Air			Nitrogen, N ₂			Oxygen, O ₂			
250	1.003	0.716	1.401	1.039	0.742	1.400	0.913	0.653	1.398	250
300	1.005	0.718	1.400	1.039	0.743	1.400	0.918	0.658	1.395	300
350	1.008	0.721	1.398	1.041	0.744	1.399	0.928	0.668	1.389	350
400	1.013	0.726	1.395	1.044	0.747	1.397	0.941	0.681	1.382	400
450	1.020	0.733	1.391	1.049	0.752	1.395	0.956	0.696	1.373	450
500	1.029	0.742	1.387	1.056	0.759	1.391	0.972	0.712	1.365	500
550	1.040	0.753	1.381	1.065	0.768	1.387	0.988	0.728	1.358	550
600	1.051	0.764	1.376	1.075	0.778	1.382	1.003	0.743	1.350	600
650	1.063	0.776	1.370	1.086	0.789	1.376	1.017	0.758	1.343	650
700	1.075	0.788	1.364	1.098	0.801	1.371	1.031	0.774	1.337	700
750	1.087	0.800	1.359	1.110	0.813	1.365	1.043	0.785	1.332	750
800	1.099	0.812	1.354	1.121	0.825	1.360	1.054	0.794	1.327	800
900	1.121	0.834	1.344	1.145	0.849	1.349	1.074	0.814	1.319	900
1000	1.142	0.855	1.336	1.167	0.870	1.341	1.090	0.830	1.313	1000

Temp. K	Carbon dioxide, CO ₂			Carbon monoxide, CO			Hydrogen, H ₂			Temp. K
	c_p	c_v	k	c_p	c_v	k	c_p	c_v	k	
250	0.791	0.602	1.314	1.039	0.743	1.400	14.052	9.927	1.416	250
300	0.846	0.657	1.288	1.040	0.744	1.399	14.307	10.183	1.405	300
350	0.895	0.706	1.268	1.043	0.746	1.398	14.427	10.302	1.400	350
400	0.939	0.750	1.252	1.047	0.751	1.395	14.476	10.352	1.398	400
450	0.978	0.790	1.239	1.054	0.757	1.392	14.501	10.377	1.398	450
500	0.978	0.790	1.239	1.054	0.757	1.392	14.513	10.389	1.397	500
550	1.014	0.825	1.229	1.063	0.767	1.387	14.513	10.389	1.397	550
600	1.046	0.857	1.220	1.075	0.778	1.382	14.530	10.405	1.396	600
650	1.075	0.886	1.213	1.087	0.790	1.376	14.546	10.422	1.396	650
700	1.102	0.913	1.207	1.100	0.803	1.370	14.571	10.447	1.395	700
750	1.126	0.937	1.202	1.113	0.816	1.364	14.604	10.480	1.394	750
800	1.148	0.959	1.197	1.126	0.829	1.358	14.645	10.521	1.392	800
850	1.169	0.980	1.193	1.139	0.842	1.353	14.695	10.570	1.390	850
900	1.204	1.015	1.186	1.163	0.866	1.343	14.822	10.698	1.385	900
1000	1.234	1.045	1.181	1.185	0.888	1.335	14.983	10.859	1.380	1000

Source: Adapted from K. Wark, *Thermodynamics*, 4th ed., McGraw-Hill, New York, 1983, as based on "Tables of Thermal Properties of Gases," NBS Circular 564, 1955.

Table A-14

TABLE A-17 Ideal Gas Properties of Nitrogen, N₂

$T(K)$, \bar{h} and \bar{u} (kJ/kmol), \bar{s}° (kJ/kmol · K)

$[\bar{h}_f^\circ = 0 \text{ kJ/kmol}]$

T	\bar{h}	\bar{u}	\bar{s}°
0	0	0	0
220	6,391	4,562	182.639
230	6,683	4,770	183.938
240	6,975	4,979	185.180
250	7,266	5,188	186.370
260	7,558	5,396	187.514
270	7,849	5,604	188.614
280	8,141	5,813	189.673
290	8,432	6,021	190.695
298	8,669	6,190	191.502
300	8,723	6,229	191.682
310	9,014	6,437	192.638
320	9,306	6,645	193.562
330	9,597	6,853	194.459
340	9,888	7,061	195.328
350	10,180	7,270	196.173
360	10,471	7,478	196.995
370	10,763	7,687	197.794
380	11,055	7,895	198.572
390	11,347	8,104	199.331
400	11,640	8,314	200.071
410	11,932	8,523	200.794
420	12,225	8,733	201.499
430	12,518	8,943	202.189
440	12,811	9,153	202.863
450	13,105	9,363	203.523
460	13,399	9,574	204.170
470	13,693	9,786	204.803
480	13,988	9,997	205.424
490	14,285	10,210	206.033
500	14,581	10,423	206.630
510	14,876	10,635	207.216
520	15,172	10,848	207.792
530	15,469	11,062	208.358
540	15,766	11,277	208.914
550	16,064	11,492	209.461
560	16,363	11,707	209.999
570	16,662	11,923	210.528
580	16,962	12,139	211.049
590	17,262	12,356	211.562

T	\bar{h}	\bar{u}	\bar{s}°
600	17,563	12,574	212.066
610	17,864	12,792	212.564
620	18,166	13,011	213.055
630	18,468	13,230	213.541
640	18,772	13,450	214.018
650	19,075	13,671	214.489
660	19,380	13,892	214.954
670	19,685	14,114	215.413
680	19,991	14,337	215.866
690	20,297	14,560	216.314
700	20,604	14,784	216.756
710	20,912	15,008	217.192
720	21,220	15,234	217.624
730	21,529	15,460	218.059
740	21,839	15,686	218.472
750	22,149	15,913	218.889
760	22,460	16,141	219.301
770	22,772	16,370	219.709
780	23,085	16,599	220.113
790	23,398	16,830	220.512
800	23,714	17,061	220.907
810	24,027	17,292	221.298
820	24,342	17,524	221.684
830	24,658	17,757	222.067
840	24,974	17,990	222.447
850	25,292	18,224	222.822
860	25,610	18,459	223.194
870	25,928	18,695	223.562
880	26,248	18,931	223.927
890	26,568	19,168	224.288
900	26,890	19,407	224.647
910	27,210	19,644	225.002
920	27,532	19,883	225.353
930	27,854	20,122	225.701
940	28,178	20,362	226.047
950	28,501	20,603	226.389
960	28,826	20,844	226.728
970	29,151	21,086	227.064
980	29,476	21,328	227.398
990	29,803	21,571	227.728

Z

TABLE A-18 Ideal Gas Properties of Oxygen, O₂

$T(K)$, \bar{h} and \bar{u} (kJ/kmol), \bar{s}° (kJ/kmol · K)

$[\bar{h}_f^\circ = 0 \text{ kJ/kmol}]$

T	\bar{h}	\bar{u}	\bar{s}°
0	0	0	0
220	6,404	4,575	196.171
230	6,694	4,782	197.461
240	6,984	4,989	198.696
250	7,275	5,197	199.885
260	7,566	5,405	201.027
270	7,858	5,613	202.128
280	8,150	5,822	203.191
290	8,443	6,032	204.218
29K	8,682	6,203	205.033
300	8,736	6,242	205.213
310	9,030	6,453	206.177
320	9,325	6,664	207.112
330	9,620	6,877	208.020
340	9,916	7,090	208.904
350	10,213	7,303	209.765
360	10,511	7,518	210.604
370	10,809	7,733	211.423
380	11,109	7,949	212.222
390	11,409	8,166	213.002
400	11,711	8,384	213.765
410	12,012	8,603	214.510
420	12,314	8,822	215.241
430	12,618	9,043	215.955
440	12,923	9,264	216.656
450	13,228	9,487	217.342
460	13,535	9,710	218.016
470	13,842	9,935	218.676
480	14,151	10,160	219.326
490	14,460	10,386	219.963
500	14,770	10,614	220.589
510	15,082	10,842	221.206
520	15,395	11,071	221.812
530	15,708	11,301	222.409
540	16,022	11,533	222.997
550	16,338	11,765	223.576
560	16,654	11,998	224.146
570	16,971	12,232	224.708
580	17,290	12,467	225.262
590	17,609	12,703	225.808

T	\bar{h}	\bar{u}	\bar{s}°
600	17,929	12,940	226.346
610	18,250	13,178	226.877
620	18,572	13,417	227.400
630	18,895	13,657	227.918
640	19,219	13,898	228.429
650	19,544	14,140	228.932
660	19,870	14,383	229.430
670	20,197	14,626	229.920
680	20,524	14,871	230.405
690	20,854	15,116	230.885
700	21,184	15,364	231.358
710	21,514	15,611	231.827
720	21,845	15,859	232.291
730	22,177	16,107	232.748
740	22,510	16,357	233.201
750	22,844	16,607	233.649
760	23,178	16,859	234.091
770	23,513	17,111	234.528
780	23,850	17,364	234.960
790	24,186	17,618	235.387
800	24,523	17,872	235.810
810	24,861	18,126	236.230
820	25,199	18,382	236.644
830	25,537	18,637	237.055
840	25,877	18,893	237.462
850	26,218	19,150	237.864
860	26,559	19,408	238.264
870	26,899	19,666	238.660
880	27,242	19,925	239.051
890	27,584	20,185	239.439
900	27,928	20,445	239.823
910	28,272	20,706	240.203
920	28,616	20,967	240.580
930	28,960	21,228	240.953
940	29,306	21,491	241.323
950	29,652	21,754	241.689
960	29,999	22,017	242.052
970	30,345	22,280	242.411
980	30,692	22,544	242.768
990	31,041	22,809	243.120

TABLE A-19 Ideal Gas Properties of Water Vapor, H₂O

$T(K)$, \bar{h} and \bar{u} (kJ/kmol), \bar{s}° (kJ/kmol · K)

$[\bar{h}_f^\circ = -241,820 \text{ kJ/kmol}]$

T	\bar{h}	\bar{u}	\bar{s}°	T	\bar{h}	\bar{u}	\bar{s}°
0	0	0	0	600	20,402	15,413	212.920
220	7,295	5,466	178.576	610	20,765	15,693	213.529
230	7,628	5,715	180.054	620	21,130	15,975	214.122
240	7,961	5,965	181.471	630	21,495	16,257	214.707
250	8,294	6,215	182.831	640	21,862	16,541	215.285
260	8,627	6,466	184.139	650	22,230	16,826	215.856
270	8,961	6,716	185.399	660	22,600	17,112	216.419
280	9,296	6,968	186.616	670	22,970	17,399	216.976
290	9,631	7,219	187.791	680	23,342	17,688	217.527
298	9,904	7,425	188.720	690	23,714	17,978	218.071
300	9,966	7,472	188.928	700	24,088	18,268	218.610
310	10,302	7,725	190.030	710	24,464	18,561	219.142
320	10,639	7,978	191.098	720	24,840	18,854	219.668
330	10,976	8,232	192.136	730	25,218	19,148	220.189
340	11,314	8,487	193.144	740	25,597	19,444	220.707
350	11,652	8,742	194.125	750	25,977	19,741	221.215
360	11,992	8,998	195.081	760	26,358	20,039	221.720
370	12,331	9,255	196.012	770	26,741	20,339	222.221
380	12,672	9,513	196.920	780	27,125	20,639	222.717
390	13,014	9,771	197.807	790	27,510	20,941	223.207
400	13,356	10,030	198.673	800	27,896	21,245	223.693
410	13,699	10,290	199.521	810	28,284	21,549	224.174
420	14,043	10,551	200.350	820	28,672	21,855	224.651
430	14,388	10,813	201.160	830	29,062	22,162	225.123
440	14,734	11,075	201.955	840	29,454	22,470	225.592
450	15,080	11,339	202.734	850	29,846	22,779	226.057
460	15,428	11,603	203.497	860	30,240	23,090	226.517
470	15,777	11,869	204.247	870	30,635	23,402	226.973
480	16,126	12,135	204.982	880	31,032	23,715	227.426
490	16,477	12,403	205.705	890	31,429	24,029	227.875
500	16,828	12,671	206.413	900	31,828	24,345	228.321
510	17,181	12,940	207.112	910	32,228	24,662	228.763
520	17,534	13,211	207.799	920	32,629	24,980	229.202
530	17,889	13,482	208.475	930	33,032	25,300	229.637
540	18,245	13,755	209.139	940	33,436	25,621	230.070
550	18,601	14,028	209.795	950	33,841	25,943	230.499
560	18,959	14,303	210.440	960	34,247	26,265	230.924
570	19,318	14,579	211.075	970	34,653	26,588	231.347
580	19,678	14,856	211.702	980	35,061	26,913	231.767
590	20,039	15,134	212.320	990	35,472	27,240	232.184

H₂O

TABLE A-22 Ideal Gas Properties of Air

T (K)	h (kJ/kg)	h ^o (kJ/kg)	u (kJ/kg)	u ^o (kJ/kg)	s ^o (kJ/kg·K)	T	h	h ^o	u	u ^o	s ^o	p _r	μ	μ ^o	p _r	μ	μ ^o
200	199.97	0.3363	142.56	1707.	1.29559	450	451.80	5.775	322.62	223.6	2.11161						
210	209.97	0.3987	149.69	1512.	1.34444	460	462.02	6.245	329.97	211.4	2.13407						
220	219.97	0.4690	156.82	1346.	1.39105	470	472.24	6.742	337.32	200.1	2.15604						
230	230.02	0.5477	164.00	1205.	1.43557	480	482.49	7.268	344.70	189.5	2.17760						
240	240.02	0.6355	171.13	1084.	1.47824	490	492.74	7.824	352.08	179.7	2.19876						
250	250.05	0.7329	178.28	979.	1.51917	500	503.02	8.411	359.49	170.6	2.21952						
260	260.09	0.8405	185.45	887.8	1.58848	510	513.32	9.031	366.92	162.1	2.23993						
270	270.11	0.9590	192.60	808.0	1.59634	520	523.63	9.684	374.36	154.1	2.25997						
280	280.13	1.0889	199.75	738.0	1.63279	530	533.98	10.37	381.84	146.7	2.27967						
285	285.14	1.1584	203.33	706.1	1.65055	540	544.35	11.10	389.34	139.7	2.29906						
290	290.16	1.2311	206.91	676.1	1.66802	550	554.74	11.86	396.86	133.1	2.31809						
295	295.17	1.3068	210.49	647.9	1.68515	560	565.17	12.66	404.42	127.0	2.33685						
300	300.19	1.3860	214.07	621.2	1.70203	570	575.59	13.50	411.97	121.2	2.35531						
305	305.22	1.4686	217.67	596.0	1.71865	580	586.04	14.38	419.55	115.7	2.37348						
310	310.24	1.5546	221.25	572.3	1.73498	590	596.52	15.31	427.15	110.6	2.39140						
315	315.27	1.6442	224.85	549.8	1.75106	600	607.02	16.28	434.78	105.8	2.40902						
320	320.29	1.7375	228.42	528.6	1.76690	610	617.53	17.30	442.42	101.2	2.42644						
325	325.31	1.8345	232.02	508.4	1.78249	620	628.07	18.36	450.09	96.92	2.44356						
330	330.34	1.9352	235.61	489.4	1.79783	630	638.63	19.84	457.78	92.84	2.46048						
340	340.42	2.1149	242.82	454.1	1.82790	640	649.22	20.64	465.50	88.99	2.47716						
350	350.49	2.379	250.02	422.2	1.85708	650	659.84	21.86	473.25	85.34	2.49364						
360	360.58	2.626	257.24	393.4	1.88543	660	670.47	23.13	481.01	81.89	2.50985						
370	370.67	2.892	264.46	367.2	1.91313	670	681.14	24.46	488.81	78.61	2.52589						
380	380.77	3.176	271.69	343.4	1.94001	680	691.82	25.85	496.62	75.50	2.54175						
390	390.88	3.481	278.93	321.5	1.96633	690	702.52	27.29	504.45	72.56	2.55731						
400	400.98	3.806	286.16	301.6	1.99194	700	713.27	28.80	512.33	69.76	2.57277						
410	411.12	4.153	293.43	283.3	2.01699	710	724.04	30.38	520.23	67.07	2.58810						
420	421.26	4.522	300.69	266.6	2.04142	720	734.82	32.02	528.14	64.53	2.60319						
430	431.43	4.915	307.99	251.1	2.06533	730	745.62	33.72	536.07	62.13	2.61803						
440	441.61	5.332	315.30	236.8	2.08870	740	756.44	35.50	544.02	59.82	2.63280						

Air

TABLE A-22 (Continued)

T	h	P_r	u	v_r	s^*	T	h	P_r	u	v_r	s^*
750	767.29	37.35	551.99	57.63	2.64737	1300	1395.97	330.9	1022.82	11.275	3.27345
760	778.18	39.27	560.01	55.54	2.66176	1320	1419.76	352.5	1040.88	10.747	3.29160
770	789.11	41.31	568.07	53.39	2.67595	1340	1443.60	375.3	1058.94	10.247	3.30959
780	800.03	43.35	576.12	51.64	2.69013	1360	1467.49	399.1	1077.10	9.780	3.32724
790	810.99	45.55	584.21	49.86	2.70400	1380	1491.44	424.2	1095.26	9.337	3.34474
800	821.95	47.75	592.30	48.08	2.71787	1400	1515.42	450.5	1113.52	8.919	3.36200
820	843.98	52.59	608.59	44.84	2.74504	1420	1539.44	478.0	1131.77	8.526	3.37901
840	866.08	57.60	624.95	41.85	2.77170	1440	1563.51	506.9	1150.13	8.153	3.39586
860	888.27	63.09	641.40	39.12	2.79783	1460	1587.63	537.1	1168.49	7.801	3.41247
880	910.56	68.98	657.95	36.61	2.82344	1480	1611.79	568.8	1186.95	7.468	3.42892
900	932.93	75.29	674.58	34.31	2.84856	1500	1635.97	601.9	1205.41	7.152	3.44516
920	955.38	82.05	691.28	32.18	2.87324	1520	1660.23	636.5	1223.87	6.854	3.46120
940	977.92	89.28	708.08	30.22	2.89748	1540	1684.51	672.8	1242.43	6.569	3.47712
960	1000.55	97.00	725.02	28.40	2.92128	1560	1708.82	710.5	1260.99	6.301	3.49276
980	1023.25	105.2	741.98	26.73	2.94468	1580	1733.17	750.0	1279.65	6.046	3.50829
1000	1046.04	114.0	758.94	25.17	2.96770	1600	1757.57	791.2	1298.30	5.804	3.52364
1020	1068.89	123.4	776.10	23.72	2.99034	1620	1782.00	834.1	1316.96	5.574	3.53879
1040	1091.85	133.3	793.36	22.39	3.01260	1640	1806.46	878.9	1335.72	5.355	3.55381
1060	1114.86	143.9	810.62	21.14	3.03449	1660	1830.96	925.6	1354.48	5.147	3.56867
1080	1137.89	155.2	827.88	19.98	3.05608	1680	1855.50	974.2	1373.24	4.949	3.58335
1100	1161.07	167.1	845.33	18.896	3.07732	1700	1880.1	1025	1392.7	4.761	3.5979
1120	1184.28	179.7	862.79	17.886	3.09825	1750	1941.6	1161	1439.8	4.328	3.6336
1140	1207.57	193.1	880.35	16.946	3.11883	1800	2003.3	1310	1487.2	3.944	3.6684
1160	1230.92	207.2	897.91	16.064	3.13916	1850	2065.3	1475	1534.9	3.601	3.7023
1180	1254.34	222.2	915.57	15.241	3.15916	1900	2127.4	1655	1582.6	3.295	3.7354
1200	1277.79	238.0	933.33	14.470	3.17888	1950	2189.7	1852	1630.6	3.022	3.7677
1220	1301.31	254.7	951.09	13.747	3.19834	2000	2252.1	2068	1678.7	2.776	3.7994
1240	1324.93	272.3	968.95	13.069	3.21751	2050	2314.6	2303	1726.8	2.555	3.8303
1260	1348.55	290.8	986.90	12.435	3.23638	2100	2377.4	2559	1775.3	2.356	3.8605
1280	1372.24	310.4	1004.76	11.835	3.25510	2150	2440.3	2837	1823.8	2.175	3.8901
						2200	2503.2	3138	1872.4	2.012	3.9191
						2250	2566.4	3464	1921.3	1.864	3.9474

Source: Adapted from K. Wark, *Thermodynamics*, 4th ed., McGraw-Hill, New York, 1983, as based on J. H. Keenan and J. Kaye, *Gas Tables*, Wiley, New York, 1945.

Psychrometric Chart for 1 atm (SI units)

