

## National Exams May 2019

### 16-Civ-B11: Structural Materials

3 hours duration

#### **NOTES:**

1. If doubt exists as to the interpretation of any question, the candidate is urged to submit a clear statement of any assumptions made with the answer paper.
2. This is an OPEN BOOK examination. One **Text Book** of candidate's choice is allowed. The textbook can have notations listed on the margins but no loose note are permitted.
3. Please answer all 5 (FIVE) questions. All questions carry equal weight.
4. In case of numerical problems, the candidate needs to show all works. For non-numeric questions, clarity and organization of the answer are important.
5. Any non-communicating calculator is permitted.


Q.1

(a) Define static and dynamic load application with examples. What do you mean by time-dependent response of materials? Explain Creep and Viscous flow with specific examples. (3+3+4 = 10 points)

(b) Figure below shows the stress-strain relationships of metals A and B during tension test until fracture. Determine the following for the two metals.

- I. Proportional limit
- II. Yield stress at an offset strain of 0.002 in/in
- III. Ultimate strength
- IV. Modulus of resilience
- V. Toughness
- VI. Which metal is more ductile and why?

(10 points)

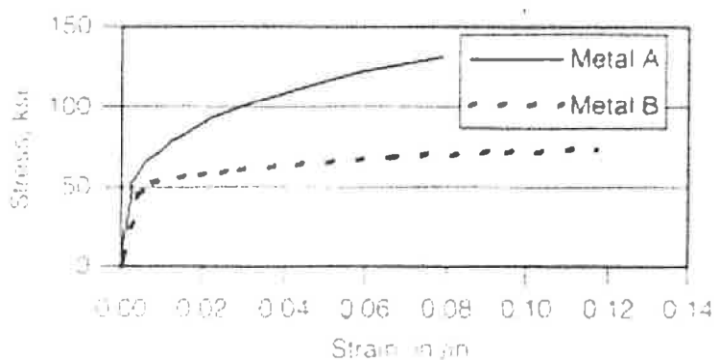

Q.2

(a) The following laboratory tests were performed on aggregate samples:

- I. Specific gravity and absorption
- II. Soundness, and
- III. Sieve analysis test

List the significance and use of each of these tests. (6 points)

(b) Perform the sieve analysis of the following aggregate and determine the fineness modulus (FM) for the aggregate sample. Plot cumulative percent passing versus sieve size graph on a semi-log paper and comment on the gradation based on the shape of graph. (14 points)

Sieve Size, mm	Amount Retained, gm
25	0
9.5	35.2
4.75	299.6
2.00	149.7
0.425	125.8
0.075	60.4
Pan	7.3

Q.3

(a) Define curing of Portland cement concrete and its importance. What do we mean by alternatives to conventional concrete? Identify any four alternative concrete with their application and advantages. (2+2+6 =10 points)

(b) In a ready-mix plant, cylindrical samples are prepared and tested periodically to detect any mix design problems and to ensure that the compressive strength is higher than the lower specification limit. The minimum target value for compressive strength was set at 4000 psi. The following compressive data were collected.

Sample No.	Compressive Strength, psi	Sample No.	Compressive Strength, psi
1	4875	14	5675
2	4800	15	4315
3	5250	16	5175
4	4125	17	4770
5	5110	18	4874
6	4316	19	5134
7	4940	20	3692
8	4950	21	4510
9	4730	22	3875
10	4205	23	4100
11	4570	24	3780
12	4324	25	3925
13	4235		

Calculate the mean, standard deviation, confidence interval (CI), and the coefficient of variation (COV) of the test data. Is the plant production meeting the specification requirement? If not, comment on possible reasons. Comment on the quality of data. (10 points)

Q.4

- (a) For asphalt concrete, define (9 points)
- i. Air voids (VTM)
  - ii. Voids in the mineral aggregate (VMA)
  - iii. Voids filled with asphalt (VFA)

(b) The Marshall method was used to design an asphalt concrete mix. An AC-30 asphalt cement with a specific gravity ( $G_b$ ) of 1.031 was used. The mix contains a 9.5 mm nominal maximum particle size aggregate with a bulk specific gravity ( $G_{sb}$ ) of 2.696. The theoretical maximum specific gravity of the mix ( $G_{mm}$ ) at asphalt content of 5.0% is 2.470. Trial mixes were made with average results as shown in the following table.

Asphalt Content $P_b$ (% by Weight of Mix)	Bulk Specific Gravity ( $G_{mb}$ )	Corrected Stability	Flow (0.25 mm)
4.0	2.360	6.3	9
4.5	2.378	6.7	10
5.0	2.395	5.4	12
5.5	2.405	5.1	15
6.0	2.415	4.7	22

Determine the design asphalt content using the Asphalt Institute design criteria for medium traffic. Use design air void content of 4% to find minimum VMA. (11 points)

Q.5

(a) A wood specimen was prepared with actual dimensions of 1 inch x 1 inch x 4 inch and grains parallel to the length. The specimen was subjected to compression parallel to the grains to failure. The load-deformation results are given below.

Load-Deformation Table

Load, lb	Displacement, inch
0	0
20	0.015
35	0.075
85	0.170
475	0.185
1650	0.215
2575	0.238
3825	0.265
4575	0.305
5325	0.325
5125	0.365
4575	0.385
4350	0.407





Plot the stress-strain relationship on a normal graph paper and calculate the modulus of elasticity. What is the failure stress? (12 points)

(b) The following laboratory tests are performed on steel specimen:

- i. Tension Test
- ii. Charpy V notch test
- iii. Bend test

What are the significance and use of these tests? (8 points)

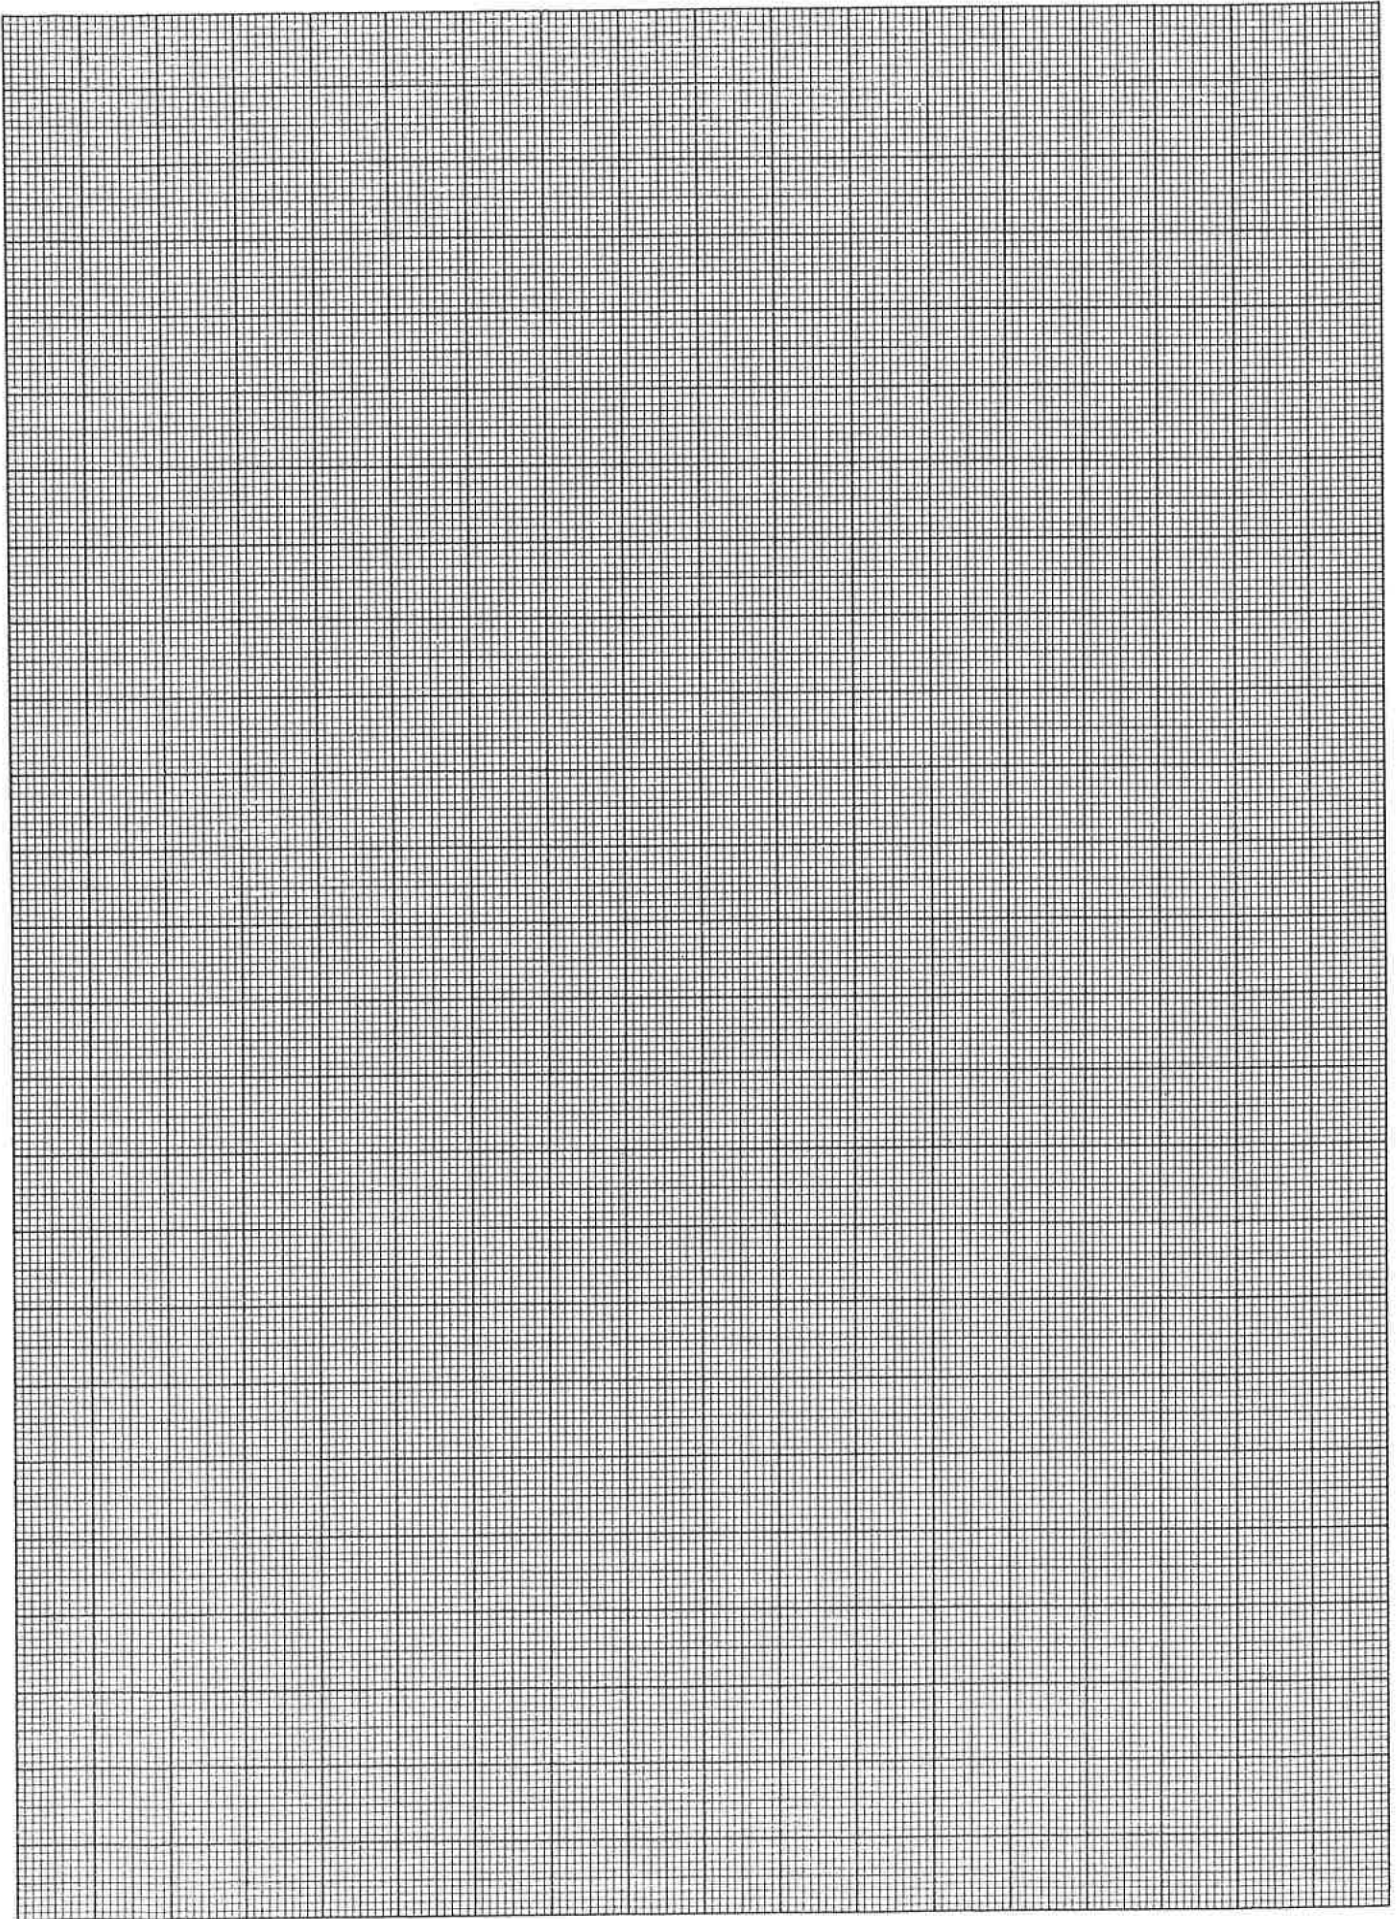

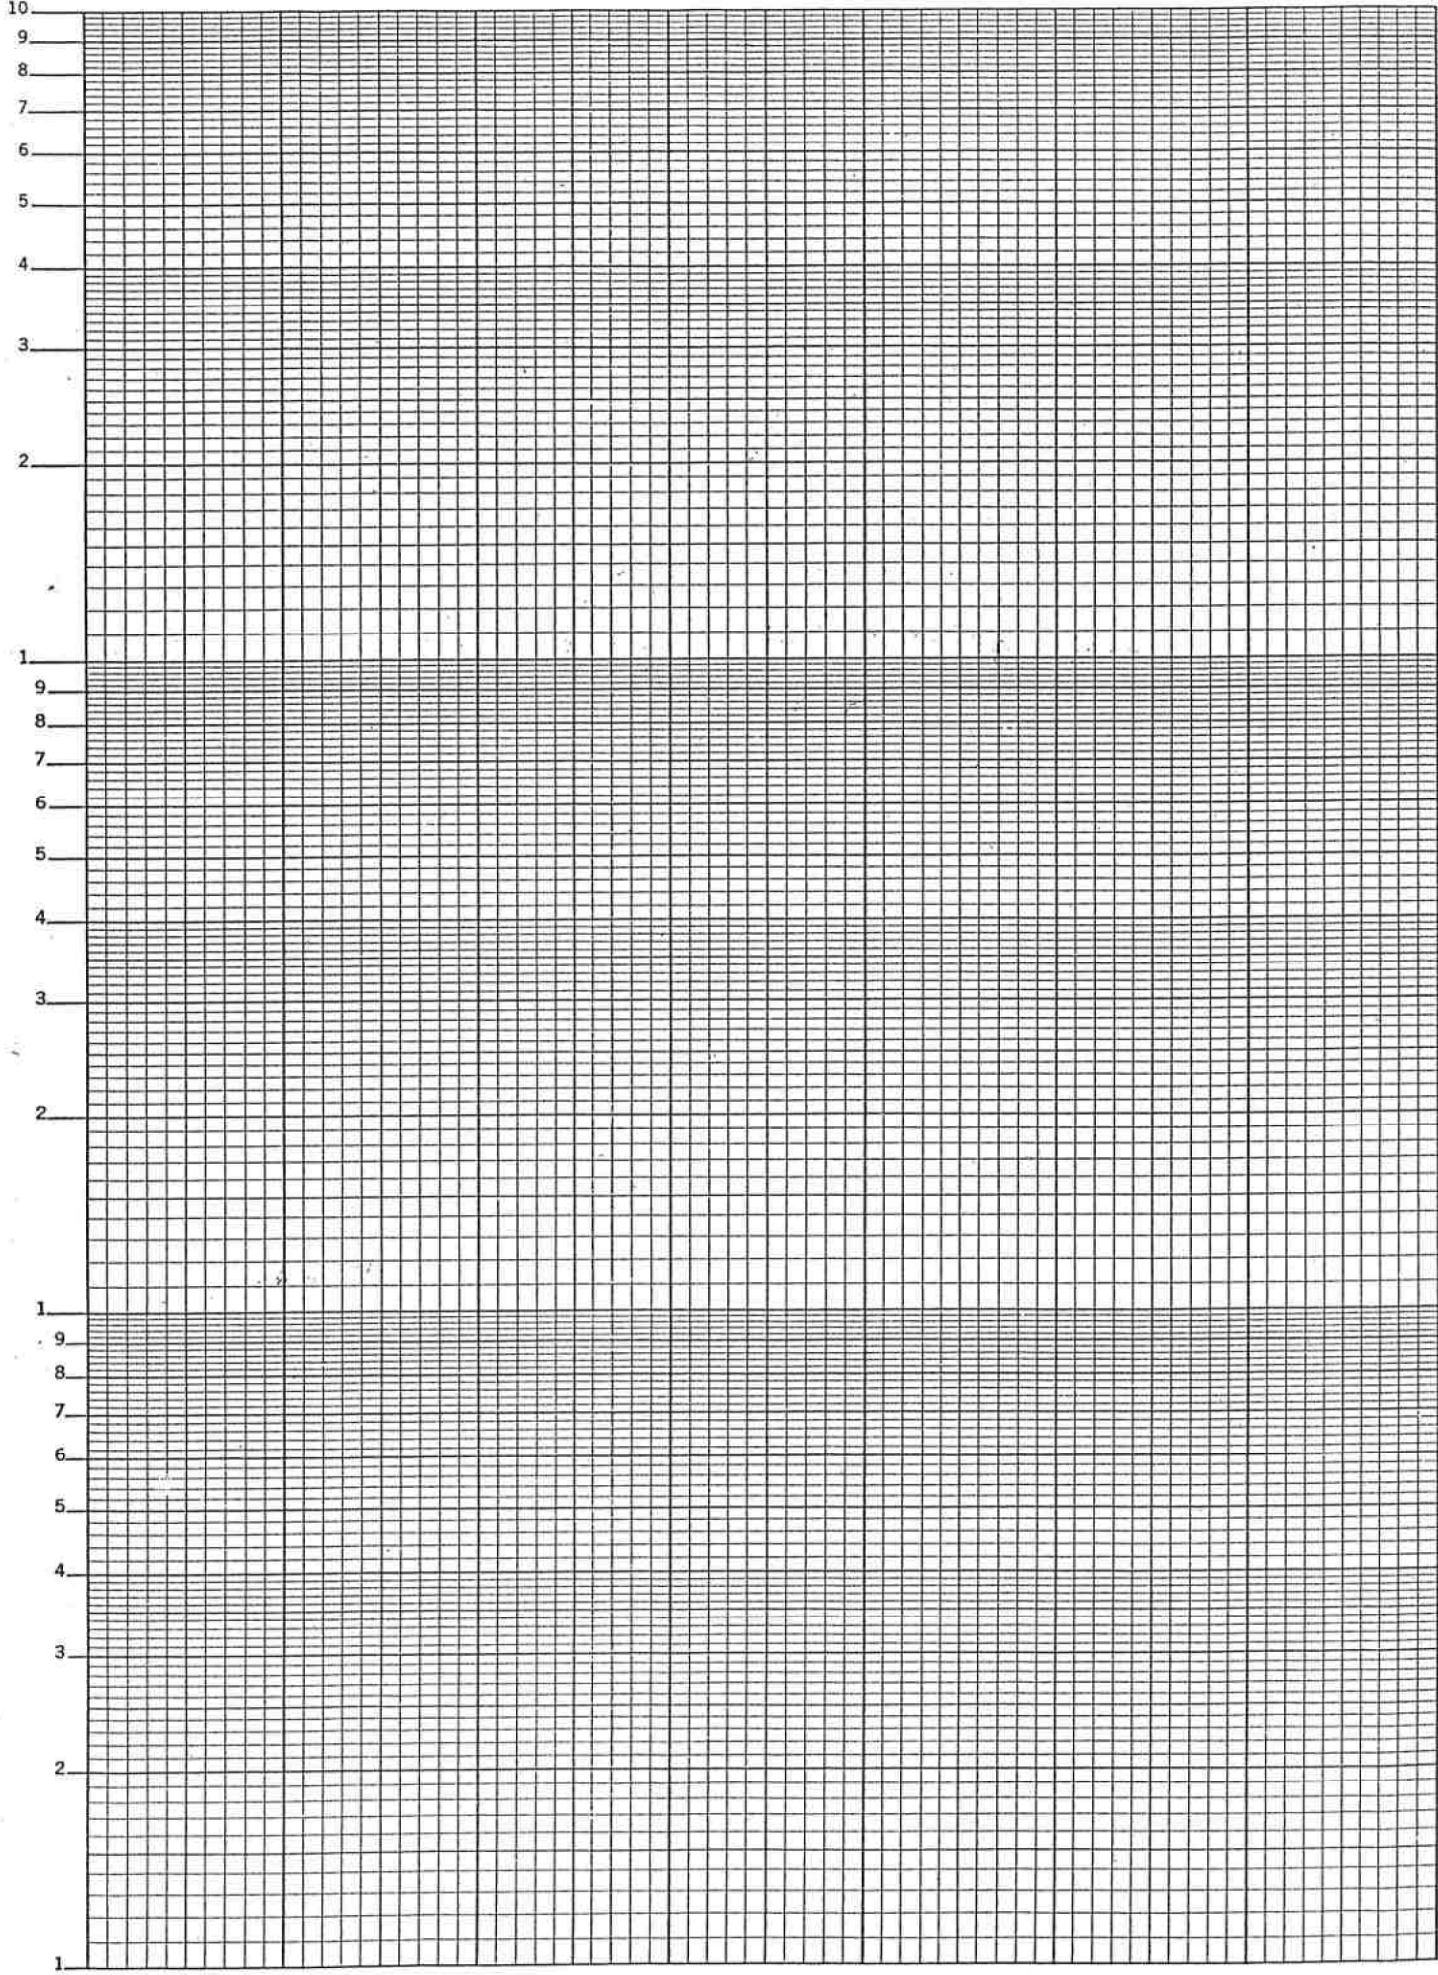



46 6010

SEMI-LOGARITHMIC 4 CYCLES X 7/10 DIVISIONS  
KEUFFEL & ESSER CO. MADE IN U.S.A.

