

DECEMBER 2013

NATIONAL EXAMINATIONS

04-BS-11 Properties of Materials

3 Hours Duration

Notes:

- (i) If doubt exists as to the interpretation of any question, the candidate is urged to submit with the answer paper, a clear statement of any assumption made.
- (ii) Candidates may use one of two calculators, the Casio or Sharp approved models. This is a “closed book” examination.
- (iii) Any five of the eight (5 of 8) questions constitute a complete paper. Only the first five questions as they appear in your answer book will be marked.
- (iv) All questions are of equal value.

Information:

(1) Atomic Masses (g.mol⁻¹)

H 1.0	Be 9.0	C 12.0	N 14.0	O 16.0	F 19.0
Al 27.0	Si 28.1	Cl 35.5	Fe 55.9	Ni 58.7	Cu 63.54

(2) Constants and Conversions

Avagadro's number, N _A	= 0.602 x 10 ²⁴ mol ⁻¹
Boltzmann's constant, k	= 13.8 x 10 ⁻²⁴ J/atom·K
Calorie	= 4.18 J
Electron volt, eV	= 0.16 x 10 ⁻¹⁸ J
Kelvin, K	= °C + 273

(3) Prefixes

tera T	10 ¹²	milli m	10 ⁻³
giga G	10 ⁹	micro μ	10 ⁻⁶
mega M	10 ⁶	nano n	10 ⁻⁹
kilo k	10 ³	pico p	10 ⁻¹²

(4) Useful equations

Interplanar spacing	$d_{hkl} = \frac{a_o}{\sqrt{h^2 + k^2 + l^2}}$	Boltzmann	$\frac{n}{N} = Me^{-E/kT}$
Nernst	$E = E_o + \frac{0.0592}{n} \log(C_{ion})$		

Questions:

1. (a) Using a diagram show that the resolved shear stress in the slip plane (Schmid's law) is:

$$\tau = \sigma \cos \phi \cos \lambda$$


where, ϕ = angle between the applied force and the normal to the slip plane,
 λ = angle between the applied force and the slip direction,
 σ = applied tensile stress

What orientations would yield the maximum value for resolved shear stress? Express this maximum value as a function of the applied tensile stress.

- (b) A force of 2500 lb is applied to a 0.25 in diameter nickel wire having a yield strength of 45,000 psi and a tensile strength of 55,000 psi. Determine whether the wire will
- (i) deform plastically
 - (ii) experience necking
2. (a) X-ray data gives the lattice constant of silver to be 0.4073 nm and its structure face centered cubic. Calculate the density ($\text{g}\cdot\text{cm}^{-3}$) and atomic radius (nm) of silver.
- (b) Determine the planar density and packing fraction for silver in the (100), (110), and (111) planes. Which, if any, of these planes is close packed?
3. Beryllium melts at 1252 °C and silicon melts at 1414 °C. They are completely soluble as liquids, but completely insoluble as solids. They form a eutectic at 1090 °C containing 39% beryllium. Draw the thermal equilibrium diagram and label all fields. Explain, with the aid of sketches, what happens when liquid alloys containing (a) 90% beryllium, (b) 30% beryllium solidify completely during a slow cooling process. In each case determine the amount (%) of eutectic in the cooled solid.
4. At 500°C, a diffusion experiment indicates that 1 in 10^{10} atoms has enough activation energy to jump out of its lattice position into an interstitial site. At 600 °C, this fraction increases to 1 in 10^9 atoms.
- (a) Calculate the activation energy required for the jump. Give your answer in eV/atom and also in cal/mole.
 - (b) What fraction of the atoms has enough energy at 700 °C?

5. (a) The melt index is the rate at which a polymer is extruded under prescribed conditions through a die of specified length and diameter (ASTM-D-1238). The units are grams of polymer extruded in 10 minutes.
- How does the melt index vary with molecular weight of the polymer?
 - Explain why the weight average molecular weight would be more important as a measure of the melt index than would the number average molecular weight.
- (b) The degree of polymerization of polytetrafluorethylene (PTFE or Teflon) is 8000. If all the polymer chains are of the same length, calculate:
- The molecular weight of the chains
 - The total number of chains in 1200 g of the polymer.

6. A large panel has a central crack through the thickness of $2a = 0.2$ in. as shown at the right. The panel is 20 in wide and 0.5 in thick and is made of a material of fracture toughness, $K_{Ic} = 24,000 \text{ psi}\sqrt{\text{in}}$. The panel is cyclically loaded between zero stress and 13,000 psi. Calculate:

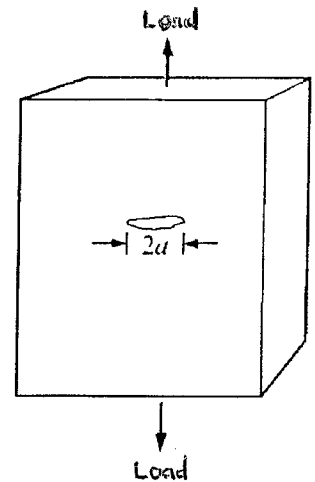

- the length of crack at which failure occurs
- the number of fatigue cycles it takes to cause failure of the panel.

Hint: For a centre cracked panel, $K_{Ic} = \sigma\sqrt{\pi a} Y(a/w)$ and you may assume $Y(a/w) = 1$ as $a \ll w$. The growth of fatigue follows the law $\frac{da}{dN} = C(\Delta K)^m$ where $C = 1.8 \times 10^{-18} \text{ in}/(\text{cycle}\cdot\text{psi}\sqrt{\text{in}})$, $\Delta K = K_{\max} - K_{\min}$, and $m = 3.0$.

7. (a) How do porosity and grain size affect the tensile strength of ceramic materials?
- (b) What are glass network modifiers? How do they affect the silica-glass network? Why are they added to silica glass?
- (c) What factors must be considered when designing a fibre reinforced composite?

8. (a) Fig 1 shows the TTT diagram for a 0.35% carbon steel. The hardness data are for fully transformed structures.
- (i) A foundry finds that castings made of this steel are hard and unmachinable (400 HB) in the as-cast condition. Name two possible microstructures that could be responsible.
 - (ii) The same foundry hears that a competitor is annealing its castings with a cycle called an *isothermal anneal*. This involves heating of the castings, followed by isothermal transformation to a structure of 250 HB max. Draw a time-temperature chart giving this result, labelling *temperatures* and isothermal transformation *time* accurately.
- (b) Thin Belleville (cupped spring) washers are often austempered. With the aid of a heat treatment diagram describe the procedure and explain why it is employed. Indicate any limitations that may exist in using the process.
- (c) How would you expect the mechanical properties of a 2024-T4 aluminum alloy (solution-treated and naturally aged) to compare with a 2024-T6 (solution-treated and artificially aged) and 2024-T8 (solution-treated, cold worked and artificially aged) alloys. Give a clear explanation of your answers. You are expected to discuss the meaning of the terms in the brackets.